


Huebsch®

MULTI-HOUSING

Micro-Display Front Control
Commercial Washers & Dryers

COIN
CARD VEND

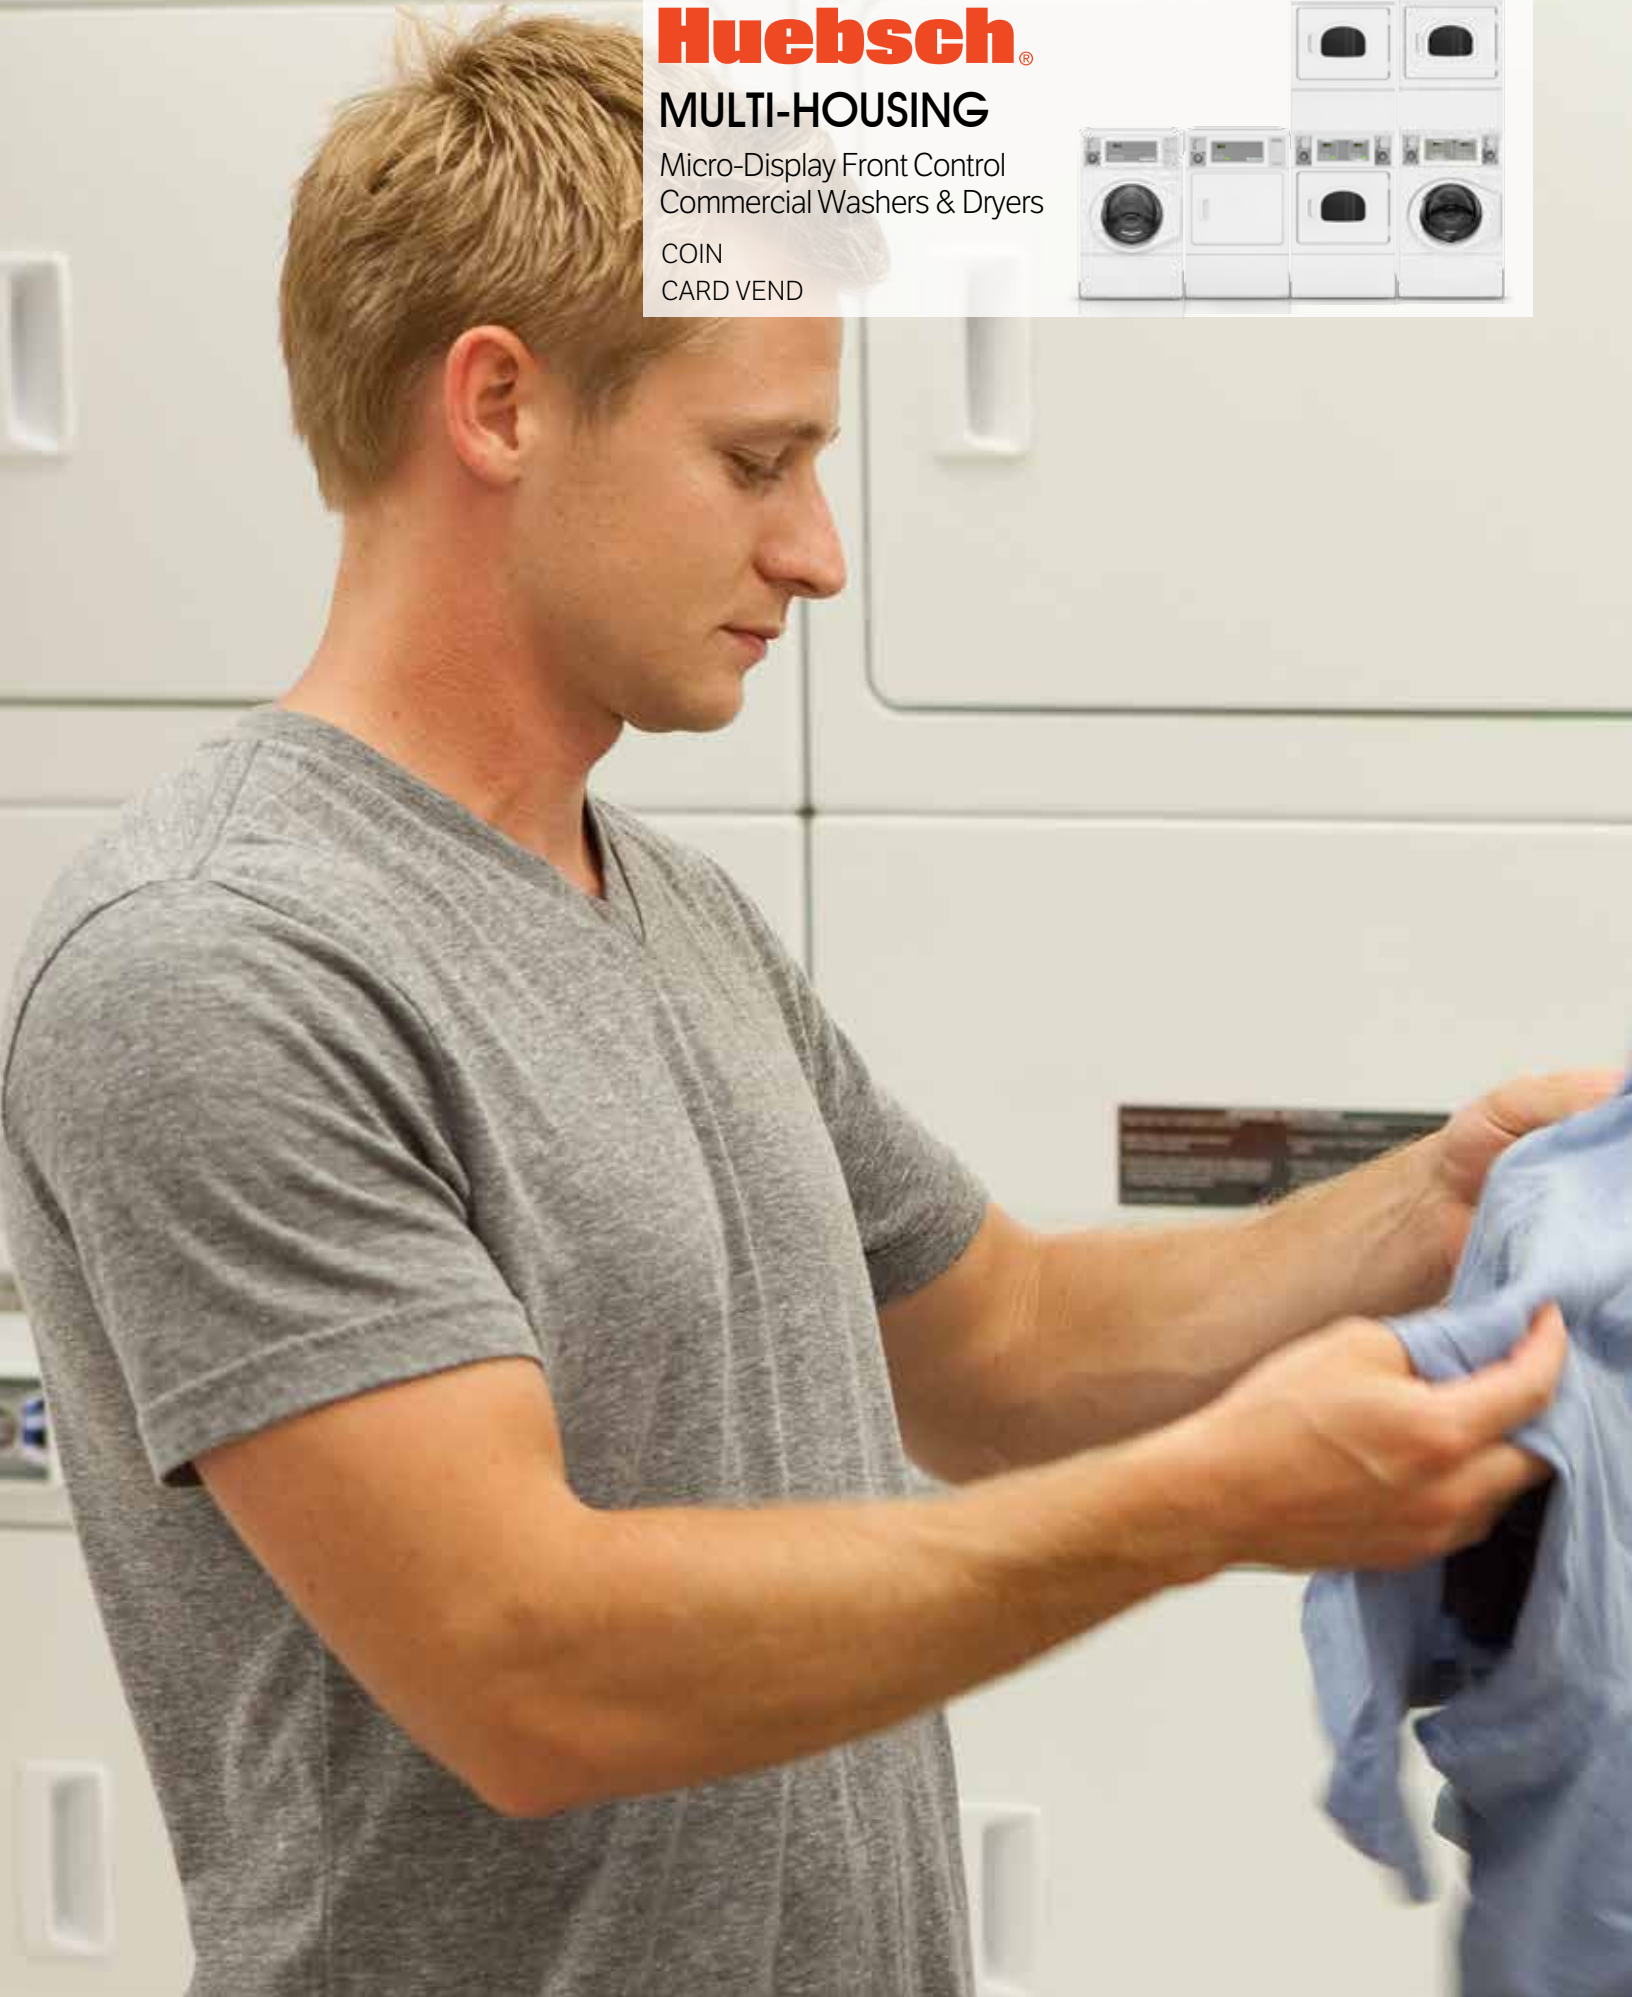

BUILT FOR **RELIABLE** PERFORMANCE.

With some of the most advanced laundry equipment controls in the industry, Huebsch provides the options and revolutionary technology for all your multi-housing laundry needs. The Micro-Display Control (MDC) offers simplified electronic controls with basic features that are most important to residents. Huebsch front load laundry products have met every design standard to be 100% ADA compliant.

Micro Display Controls offer total automated management of your laundry room with simple, powerful programming allows you the ability to:


- Display vend price, coin and time countdown.
- Touch pad selection, combines temp and cycle.
- Manually program and audit.
- Front control models all come with high capacity meter case.

ACTIVATION TYPES

Offering a variety of activation types allowing you to tailor your laundry room to fit your needs. Front control models all come with high capacity meter case.



Coin ("C")



Prep for Card ("Y")



Prep for Coin ("X")



FRONT LOAD WASHER

The Huebsch front load washer gives building owners and property managers unparalleled ability to reduce water and energy costs.

- ENERGY STAR® certified. Uses less energy, saves money and helps protect the environment
- Low water usage per cycle to reduce operating costs.



FEATURES

REVOLUTIONARY BALANCING TECHNOLOGY

Delivering uninterrupted cycles.

HIGH SPEED EXTRACT

1200 RPM final spin exerts 440 G-Force to maximize moisture removal from clothes.

LARGER DOOR OPENING

Extra-wide 15.5" (393.7 mm) door opening with heavy-duty stainless steel 10" (25.4 cm) hinge for easy loading and unloading of clothes.

DURABLE STAINLESS STEEL WASH TUB

Comes with a lifetime warranty, and actually becomes smoother with each use, so it won't pill, snag or fray clothes.

MULTI-COMPARTMENT SUPPLY DISPENSER

Automatically adds detergent, bleach and softener.

SINGLE LOAD DRYER

Huebsch's front control dryer, defined by its simplicity and performance, provides everything you need to get the job done – and nothing you don't. It combines heavy-duty construction with reliable operation proven to stand the test of time. They're designed with less moving parts for one reason: so you'll face fewer maintenance problems and less wear and tear down the road. Our cabinet design maintains the perfect balance of heat, airflow and tumble action for optimal performance and efficiency.



FEATURES

SUPERIOR DRYING CONVENIENCE

With a 2.06 sq. ft. (1914 cm²) door opening, making it the widest in the industry, Huebsch dryers offer the convenience of easy loading and unloading.

EFFICIENT DRYER HEATING

With 25,000 BTU (gas models) and up to 5,350 Watts (electric models), Huebsch dryers offer some of the fastest drying times in the industry.

UPFRONT LINT FILTER


Easy to clean and secured.

REVERSIBLE DOOR (SOLID DOORS ONLY)

For installation flexibility.

STACK DRYER

The Huebsch stack dryer offers the same great features as the single load dryer. Two commercial dryers in the space of one, both operating independently, including independent controls for optimum usage. Available with see-through or solid door models. Bottom dryer is ADA Compliant.

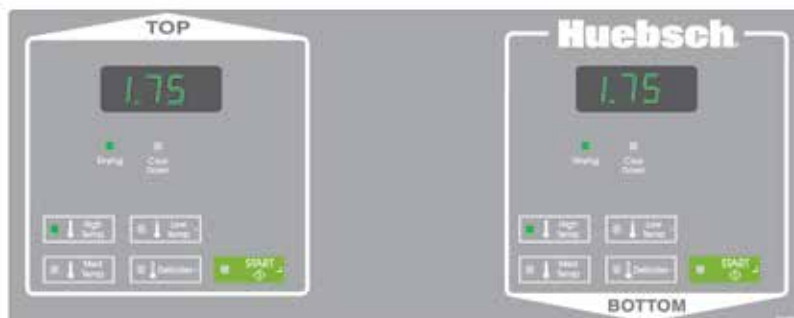

STACK WASHER/DRYER

Huebsch's stack washer/dryers bring an innovative stacked concept that takes up half the floor space that a conventional washer and dryer does when situated side by side. The freestanding softmount design can be installed on most floor types or levels. Both washer and dryer have the same hookups and connections as a standard washer and dryer. No additional plumbing or electrical change is needed. Same great features as the front control washer and dryer for superior washing and drying convenience. Washer is ADA compliant.



	Front Load Washer	Single Load Dryer	Stack Dryer	Stack Washer/Dryer
COIN	HFNBCASP113TW01 HFNBASP113CW01 HFNBASP113CW01 HFNBCASG113TW01 HFNBASP113TW01	Electric 240: HDEBCAGS171TW01 Gas: HDGBCAGS111TW01	Electric 208: HSEBCAGW171TW01 Gas: HSGBCAGW111TW01 Electric 208: HSEBDAGW291CW01 Gas: HSGBDAGW091CW01 Electric 208: HSEBEAGW291CW01 Gas: HSGBEAGW091CW01	Electric 240: HTEBCASP173TW01 Gas: HTGBCASP113TW01 HTEBDASP283CW01 HTGBDASP093CW01
PREP CARD	HFNBYPASP113CW01 HFNBYPASG113CW01	Electric 240: HDEBYAGS171CW01 Gas: HDGBYAGS111CW01	Electric 208: HSEBYAGW291CW01 Electric 240: HSEBYAGW281CW01 Gas: HSGBYAGW091CW01	Electric 240: HTEBYASP283CW01 Gas: HTGBYASP093CW01
PREP COIN	HFNBXASP113CW01	Electric 240: HDEBXAGS171CW01 Gas: HDGBXAGS111CW01		Electric 208: HTEBXASP293CW01 Electric 240: HTEBXASP283CW01
Basket/Cylinder Volume - liters (cu.ft.)	96.8 (3.42)	198 (7.0)	198 (70) (ea pocket)	96.8 (3.42) 198 (7.0)
Width - mm (in)	683 (26 7/8)	683 (26 7/8)	683 (26 7/8)	683 (26 7/8)
Depth - mm (in)	704 (27 3/4)	711 (28)	711 (28)	704 (27 3/4)
Height* - mm (in)	1126 (44 3/8)	1126 (44 3/8)	1986 (78 3/16)	1986 (78 3/16)
Weight - kg (lb)	122 (270)	Electric: 68 (150) Gas: 70 (155)	Electric: 120 (265) Gas: 125 (275)	Electric: 177 (390) Gas: 177 (390)
Shipping Weight - kg (lb)	132 (290)	Electric: 73 (160) Gas: 75 (165)	Electric: 127 (280) Gas: 132 (290)	Electric: 193 (425) Gas: 193 (425)
Cycle Time - minutes (default)	27	45	45	27/45
Motor kW (HP)	671 W (0.9 HP)	0.25 (1/3)	0.25 (1/3)	0.9 HP (671 W) 0.25 (1/3)
Water Consumption - gal (Liter)	44.3 (11.7)	N/A	N/A	44.3 (11.7)
Water Factor - gal/ft ³ (Liters/Liter/cycle)	0.52 (3.8)	N/A	N/A	0.52 (3.8)
Modified Energy Factor - ft ³ /kWh/cycle (Liters/kWh/cycle)	84.48 (2.98)	N/A	N/A	84.48 (2.98)
Average Hot Water Usage - gal (Liter)	1.4 (0.4)	N/A	N/A	1.5 (0.4)
Water Pressure PSI (Bar)	20-120 (1.4-8.3)	N/A	N/A	20-120 (1.4-8.3)
Spin Speed - RPM	500, 800, 1200	N/A	N/A	500, 800, 1200
Cycle/Temperature	Normal/Hot Normal/Warm Perm Press/Warm Normal/Cold Delicate/Cold	High Medium Low Delicate	High Medium Low Delicate	Normal/Hot Normal/Warm Perm Press/ Warm Normal/Cold Delicate/Cold
Electrical Specifications and Circuit Requirements [ONE Power Cord for Both Units]+	120/60/1-15 amp	Electric: 208/60/1-30 amp 240/60/1-30 amp* Gas: 120-60/1-15 amp	Electric: 2 ea 208/60/1-30 amp 240/60/1-30 amp* Gas: 2 ea 120-60/1-15 amp	Electric: 208/60/1-30 amp 240/60/1-30 amp* Gas: 120-60/1-15 amp
Btu per Hour (kcal)	N/A	25,000 (6300)	25,000 (6300)	25,000 (6300)
Heating Element	N/A	4750W, 208V 5350W, 240V	4750W, 208V 5350W, 240V	5350W, 240V
Type of Gas (Gas models only)	N/A	Factory-equipped natural/ mixed gas convertible to LP gas**	Factory-equipped natural/ mixed gas convertible to LP gas**	Factory-equipped natural/mixed gas convertible to LP gas**
Utility Connections - in (mm)	N/A	Gas: 3/8" NPT (9.5)	Gas: 3/8" NPT (9.5)	Gas: 3/8" NPT (9.5)
Air Outlet Diameter - in (mm)	N/A	4" (102)	4" (102)	4" (102)
Exhaust Airflow - cfm (liters/sec)†	N/A	220 (105)	220 (105)	220 (105)
Maximum Exhaust Static Back Pressure	N/A	0.6" W.C.	0.6" W.C.	0.6" W.C.
Agency Approval	cCSAus	Electric: cULus Gas: cCSAus	Electric: cULus Gas: cCSAus	Electric: cULus Gas: cCSAus
Activation	Coin/Card Op	Coin/Card Op	Coin/Card Op	Coin/Card Op
Top and Lid Finish	Porcelain	Porcelain	N/A	N/A
Colors	White	White	White	White
Door Type	Window	Solid	Window	Window
Drain	Pump, Gravity	N/A	N/A	Pump, Gravity

* Electric dryers come equipped for 240/60/1 operation. They can be field converted to operate on 208/60/1 with optional 61928 conversion kit. Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

** IMPORTANT: Any product revisions or conversions must be made by the Manufacturer's Authorized Dealers, Distributors, or local service personnel.

† Measured at point of exit from dryer.

+ ONE Power Cord for Both Units

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008. Printed in the U.S.A.

