



OPL SOFTMOUNT WASHER-EXTRACTOR

90-125 lb

Huebsch softmount washer-extractors offer smooth operation and a flexible, easy-to-install free standing design. These machines are built for durability with strong, stainless steel construction. And with 350 G-Force and revolutionary time-saving and utility-saving features, they're designed to improve efficiency and reduce costs – delivering 15% less water consumption than previous models. Improve your laundry performance like no other with our 90 and 125 lb capacities.

VARIABLE SPEED PERFORMANCE

Programmable wash speeds also ensure superior linen care, while high-speed extracts of 350 G-Force reduce drying times significantly.

EASY TO INSTALL

Because of their heavy-duty suspension systems with optimal spring and shock construction, Huebsch softmounts don't require any special foundations. That keeps installation costs low and offers flexibility to install on any floor of your building.

DURABLE CONSTRUCTION

Features high-quality, stainless steel front, side and top panels to ensure strength and reliability.

STAINLESS STEEL CYLINDER AND OUTER TUB

Superior durability with perforated cylinder ribs for optimal mechanical wash action.

LARGE DOOR OPENINGS


Extremely durable and offers easy loading and unloading for improved productivity.

FORWARD TILT OPTION

Easier unloading.



MICRO CONTROL

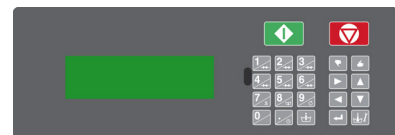

Offers a graphical multi-lingual display with up to 99 cycle programs and flexible step-based programming, along with additional features like delayed start, error counters and error log.

OPL SOFTMOUNT WASHER-EXTRACTORS

Models		HY90	HY125
Control		Micro	Micro
Capacity - lb (kg)		90 (40)	125 (55)
Width - in (mm)		47" (1195)	47" (1195)
Depth - in (mm)		56 1/2" (1430)	63 3/8" (1610)
Height - in (mm)		75" (1905)	75" (1905)
Cylinder Diameter - in (mm)		36" (914)	36" (914)
Cylinder Depth - in (mm)		24" (610)	31 1/8" (790)
Cylinder Volume - cu. ft. (liters)		14.1 (400)	18.3 (518)
Door Opening Size - in (mm)		21 5/16" (540)	21 5/16" (540)
Door Bottom to Floor - in (mm)		28 3/4" (730)	28 3/4" (730)
Wash Speed - RPM		38	38
Extract Speed - RPM		830	830
Extract G-Force		350	350
Water Inlet Connection - in (mm)		3 x 1" (25)	3 x 1" (25)
Steam Inlet Connection - in (mm)		3/4" (19)	3/4" (19)
Drain Diameter - in (mm)		2 x 3" (76)	2 x 3" (76)
Motor Size - hp (kw)		10.06 (7.50)	10.06 (7.50)
Voltage/Hz/ Phase Circuit		200-240V 50/60Hz 3ph X	X
		440-480V 50/60Hz 3ph X	X
Shipping Dimensions Approx. - in (mm)	Width	56 5/16" (1430)	56 5/16" (1430)
	Depth	61 13/16" (1570)	68 7/8" (1750)
	Height	82 15/16" (2105)	82 15/16" (2105)
Net Weight - lb (kg)		3439 (1560)	3594 (1630)
Shipping Weight - lb (kg)		3748 (1700)	3902 (1770)
Agency Approvals		CSA	CSA

Forward Tilt Option

Dimensions with Tilt - in (mm)	Width	52 1/4" (1328)	52 1/4" (1328)
	Depth	76 7/16" (1941)	80 13/16" (2053)
	Height	93 1/4" (2368)	93 3/4" (2381)
Net Weight with Tilt - lb (kg)		4079 (1850)	4255 (1930)
Shipping Dimensions with Tilt Approx. - in (mm)	Width	56 3/4" (1440)	56 3/4" (1440)
	Depth	69 1/4" (1760)	69 1/4" (1760)
	Height	92 1/2" (2350)	92 1/2" (2350)
Shipping Weight with Tilt - lb (kg)		4277 (1940)	4475 (2030)

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Czech facility has been registered to ISO 14001:2005 and 9001:2009.

©Copyright 2014 Alliance Laundry Systems LLC

Alliance Laundry Systems LLC
Shepard Street
Ripon, WI 54971
1-800-533-5120
huebsch.com

