


FCU20X126

HEATED ROLL FLATWORK FINISHER

Heated Roll Flatwork Finisher

When “good enough” isn’t good enough, our roll-heated ironers are ready to get the job done. Top-notch performance that includes safety features to match. With a wide range of electric or gas models, these machines are guaranteed to get the job done quickly, efficiently and effectively. On-premises laundries at hotels, restaurants and other sites who rely on the highest quality results will benefit from excellent final linen products and reduced operating costs.

- Constructed with heavy-duty steel frames and cylinders.
- Low maintenance.
- Easy and safe features like feeding trays, stop bars and alarms make operation both safe and simple.
- Low BTU consumption so ensure consistent temperature for energy efficiency..




Micro Control

Efficient and user-friendly, our Micro Control enables you to regulate temperature and reduce energy consumption.

SPECIFICATIONS

HEATED ROLL FLATWORK FINISHER

| | | |
|---|--|----------------|
| MODEL | FCU20X126 | |
| ROLL DIAMETER - in (mm) | 20 (502) | |
| FINISHING WIDTH - in (mm) | 126 (3200) | |
| IRONING SPEED - ft/m (m/m) | 5-26 (1.5-8) | |
| IRONER DIMENSIONS (working position) - in (mm) | Width | 155 1/2 (3950) |
| | Depth | 42 3/4 (1087) |
| | Height | 48 1/2 (1232) |
| ROLL MOTOR - HP (kW) | 0.50 (0.37) | |
| ROLL EXHAUST MOTOR - HP (kW) | 0.34 (2 x 0.255) | |
| ROLL EXHAUST DUCT - in (mm) | 6 (2 x 150) | |
| ELECTRIC HEATING | E Heat Input Power - HP (kW) | 86.9 (64.8) |
| | Electric Requirements - Circuit Breaker | |
| GAS HEATING | Max. Gas Input - Btu (kW) | 255,201 (66) |
| | Gas Inlet - in (mm) | 3/4 (19) |
| | Electric Requirements - Circuit Breaker | 230/60/3 - 15 |
| SHIPPING DIMENSIONS - in (mm) | Height | 59 (1550) |
| | Width | 160 3/4 (4085) |
| | Depth | 43 (1095) |
| SHIPPING WEIGHT - lb (kg) | Electric | 4034 (1830) |
| | Gas | 4299 (1950) |
| NET WEIGHT - lb (kg) | Electric | 3241 (1470) |
| | Gas | 3505 (1590) |
| AGENCY APPROVALS | CSA | |

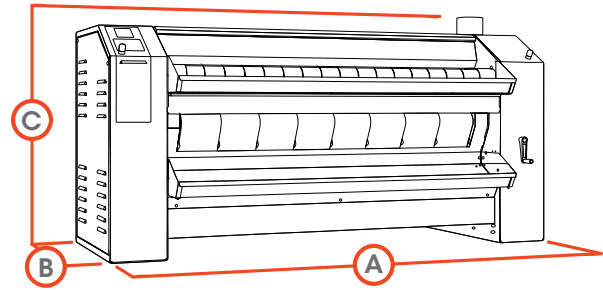

| | | |
|----|------------------|----------------|
| A. | WIDTH - in (mm) | 155 1/2 (3950) |
| B. | DEPTH - in (mm) | 42 3/4 (1087) |
| C. | HEIGHT - in (mm) | 48 1/2 (1232) |

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.