


## PPE DRYING CABINET

PTGC

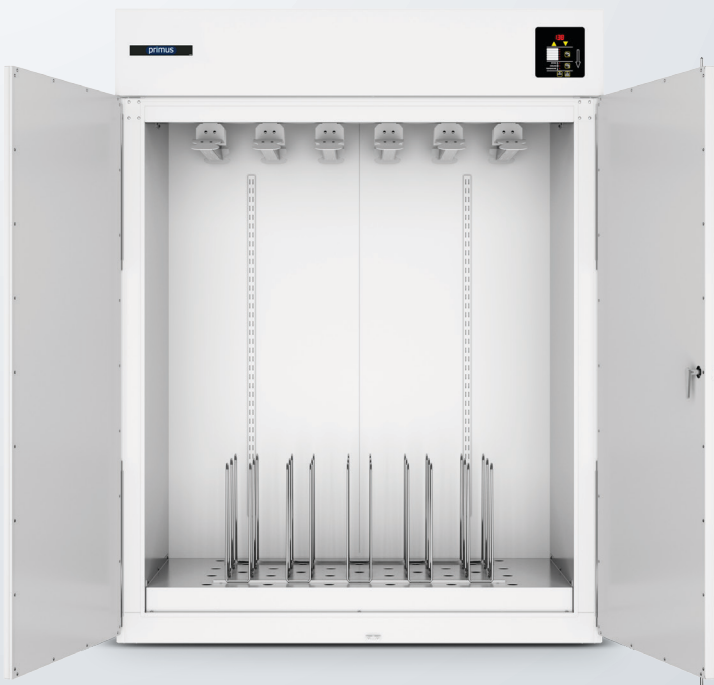

### FEATURES

- Dual blower design which sends air through hangers to dry the inside of gear
- Heated air is gently circulated around the outside
- Drying process returns gear to service in 1.5 to 3 hours
- Possibility to dry six full sets (jacket, pants, and liners) of gear at one time
- Unique rack design for drying gloves, boots, and other items
- Cabinet: powder-coated panels for long lasting corrosion protection
- Heavy-duty door hinges equal maximum durability
- Optional: utility shelf

### CONTROL

- Microprocessor control
- Easy to operate
- Five preset drying cycles - easy to re-program
- Dry cycles range from 1.5 to 3 hours



LOW ENERGY  
CONSUMPTION

## TECHNICAL SPECIFICATIONS

Width	in (mm)	61 1/8 (1553)
Depth	in (mm)	32 3/4 (832)
Height	in (mm)	79 1/2 (2019)
<b>INSIDE DIMENSIONS</b>		
Width	in (mm)	53 15/16 (1370)
Depth	in (mm)	29 3/16 (740)
Height	in (mm)	60 (1524)
Control Options		DMP
Electric Heating	kW (V)	12 (240) 9 (208)
Exhaust Diameter	in (mm)	6 (152)
Outlet Airflow	cfm	300
Net Weight	lb (kg)	534 (242)
Crated Weight	lb (kg)	594 (269)
Capacity		6 full sets of turn-out gear
<b>VOLTAGE</b>		
208V 50/60Hz 1ph		60 A
208V 50/60Hz 3ph		35 A
240V 50/60Hz 1ph		70 A
240V 50/60Hz 3ph		40 A

AY17-0001

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.

© 2017 Alliance Laundry Systems LLC

Alliance Laundry Systems LLC  
Shepard Street  
Ripon, WI 54971  
1-877-724-0187

**primus**

*laundry equipment*