


FLATWORK FINISHER

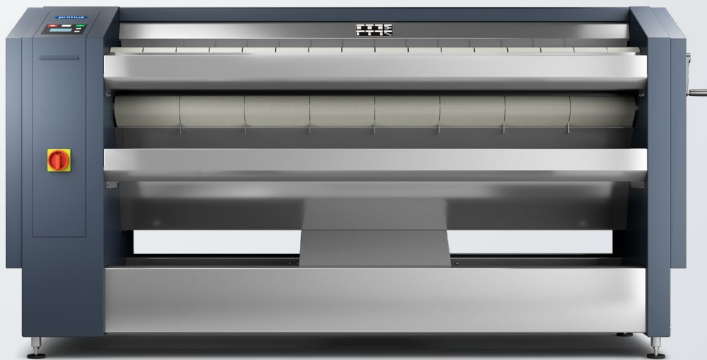

FEATURES

- Frequency - controlled motor
- Suspended roll
- Nomex ironing belts
- Polished steel cylinders maintain even heat
- Heavy-duty steel frame
- Optimized exhaust system
- Finger guards
- Safety handle
- Available in 10", 13" and 20" rolls
- Finished widths come in 55, 66, 79, 82, 102 and 126

CONTROL

- Microprocessor control
- Easy to operate
- Temperatures can be set up to 355 degrees



LOW ENERGY
CONSUMPTION

Models	I10	FCU13X66	FCU13X82	FCU20X79	FCU20X102	FCU20X126	
Roll Diameter - in (mm)	10 (254)	13 (320)	13 (320)	20 (502)	20 (502)	20 (502)	
Finishing Width - in (mm)	55 (1400)	66 (1664)	82 (2080)	79 (2000)	102 (2600)	126 (3200)	
Ironing Speed - ft/m (m/m)	7-13 (2-4)	3-20 (1-6)	3-20 (1-6)	5-26 (1.5-8)	5-26 (1.5-8)	5-26 (1.5-8)	
Ironer Dimensions (working position)							
Width - in (mm)	70 7/8 (1800)	86 1/2 (2194)	102 3/4 (2610)	108 1/4 (2750)	132 (3350)	155 1/2 (3950)	
Depth - in (mm)	16 1/2 (420)	30 (765)	30 (765)	41 1/2 (1052)	42 3/4 (1087)	42 3/4 (1087)	
Height - in (mm)	39 5/8 (1005)	43 3/4 (1110)	43 3/4 (1110)	48 1/2 (1232)	48 1/2 (1232)	48 1/2 (1232)	
Roll Motor - HP (kW)	N/A	.24 (.18)	.24 (.18)	.50 (.37)	.50 (.37)	.50 (.37)	
Exhaust Motor - HP (kW)	N/A	0.17 (0.125)	0.17 (0.125)	0.34 (0.255)	0.34 (2 x 0.255)	0.34 (2 x 0.255)	
Exhaust Duct - in (mm)	N/A	6 (150)	6 (150)	6 (150)	6 (2 x 150)	6 (2 x 150)	
Electric Heating							
E Heat Input Power - kW	N/A	24.3	27.9	37.2	54.0	64.8	
Electrical Requirements - Circuit Breaker	230/60/3 - 25	230/60/3 • 80	230/60/3 • 80	230/60/3 • 125	230/60/3 • 175	230/60/3 • 225	
Gas Heating							
Maximum Gas Input - Btu (kW)	N/A	85,303 (25)	102,364 (30)	122,837 (36)	177,431 (52)	225,201 (66)	
Gas Inlet - in (mm)	N/A	3/4 (19)	3/4 (19)	3/4 (19)	3/4 (19)	3/4 (19)	
Electric Requirements - Circuit Breaker	N/A	120/60/1 • 15	120/60/1 • 15	230/60/3 • 15	230/60/3 • 15	230/60/3 • 15	
Shipping Dimensions							
Height - in (mm)	45 1/4 (1150)	49 5/8 (1260)	49 5/8 (1260)	59 (1550)	59 (1550)	59 (1550)	
Width - in (mm)	74 (1880)	86 1/4 (2190)	102 3/4 (2610)	113 1/2 (2885)	137 1/4 (3485)	160 3/4 (4085)	
Depth - in (mm)	19 11/16 (500)	31 1/2 (800)	31 1/2 (800)	43 (1095)	43 (1095)	43 (1095)	
Weight - lb (kg)	Electric	328 (149)	1069 (485)	1235 (560)	2833 (1285)	3483 (1580)	4034 (1830)
	Gas	N/A	1025 (465)	1191 (540)	3120 (1415)	3549 (1610)	4299 (1950)
Net Weight - lb (kg)	Electric	287 (130)	959 (435)	1080 (490)	2249 (1020)	2778 (1260)	3241 (1470)
	Gas	N/A	904 (410)	1025 (465)	2535 (1150)	2844 (1290)	3505 (1590)
Approvals	ETL	CSA	CSA	CSA	CSA	CSA	

AY17-0013

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.

© 2017 Alliance Laundry Systems LLC

Alliance Laundry Systems LLC
Shepard Street
Ripon, WI 54971
1-877-724-0187

primus

laundry equipment