

ON-PREMISES  
FLATWORK FINISHER

20X79 20X102 20X126

79"

102"

126"

FCU  
RANGE



FEATURES


- Frequency - controlled motor
- Suspended roll
- Nomex ironing belts
- Polished steel cylinders maintain even heat
- Heavy-duty steel frame
- Optimized exhaust system
- Finger guards
- Safety handle
- Available in 20" rolls
- Finished widths come in 79", 102" and 126"

CONTROL

- Microprocessor control
- Easy to operate
- Temperatures can be set up to 355 degrees




LOW ENERGY  
CONSUMPTION



MODEL		FCU20X79	FCU20X102	FCU20X126
ROLL DIAMETER - in (mm)		20 (502)	20 (502)	20 (502)
FINISHING WIDTH - in (mm)		79 (2000)	102 (2600)	126 (3200)
IRONING SPEED - ft/m (m/m)		5-26 (1.5-8)	5-26 (1.5-8)	5-26 (1.5-8)
IRONER DIMENSIONS (working position) - in (mm)	Width	108.25 (2750)	132 (3350)	155.5 (3950)
	Depth	41.5 (1052)	42.75 (1087)	42.75 (1087)
	Height	48.5 (1232)	48.5 (1232)	48.5 (1232)
ROLL MOTOR - HP (kW)		0.50 (0.37)	0.50 (0.37)	0.50 (0.37)
EXHAUST MOTOR - HP (kW)		0.34 (0.255)	0.34 (2 x 0.255)	0.34 (2 x 0.255)
EXHAUST DUCT - in (mm)		6 (150)	6 (2 x 150)	6 (2 x 150)
ELECTRIC HEATING	E Heat Input Power - HP (kW)	49.9 (37.2)	72.4 (54.0)	86.9 (64.8)
	Electric Requirements - Circuit Breaker	230/60/3 - 125	230/60/3 - 175	230/60/3 - 225
GAS HEATING	Max. Gas Input - Btu (kW)	122,837 (36)	177,431 (52)	255,201 (66)
	Gas Inlet - in (mm)	0.75 (19)	0.75 (19)	0.75 (19)
	Electric Requirements - Circuit Breaker	230/60/3 - 15	230/60/3 - 15	230/60/3 - 15
SHIPPING DIMENSIONS - in (mm)	Height	59 (1550)	59 (1550)	59 (1550)
	Width	113.5 (2885)	137.25 (3485)	160.75 (4085)
	Depth	43 (1095)	43 (1095)	43 (1095)
SHIPPING WEIGHT - lb (kg)	Electric	2833 (1285)	3483 (1580)	4034 (1830)
	Gas	3120 (1415)	3549 (1610)	4299 (1950)
NET WEIGHT - lb (kg)	Electric	2249 (1020)	2778 (1260)	3241 (1470)
	Gas	2535 (1150)	2844 (1290)	3505 (1590)
APPROVALS		CSA	CSA	CSA

DIMENSIONS	FCU20X79	FCU20X102	FCU20X126
A. OVERALL WIDTH - in (mm)	108.25 (2750)	132 (3350)	155.5 (3950)
B. OVERALL DEPTH - in (mm)	41.5 (1052)	42.75 (1087)	42.75 (1087)
C. OVERALL HEIGHT - in (mm)	48.5 (1232)	48.5 (1232)	48.5 (1232)

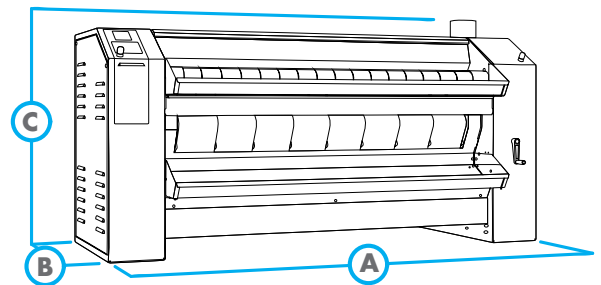

AY18-0003

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.

© 2018 Alliance Laundry Systems LLC

[www.primuslaundry.com](http://www.primuslaundry.com)

**primus**

by Alliance Laundry Systems