

VENDED
STACK DRYER/DRYER

PSEJCAGS174TG01

PSGJCAGS114TG01

FRONT
CONTROL



FEATURES

- Freestanding units can be installed on any floor
- Double capacity within the same footprint
- Two separate controls
- Two separate collection boxes
- Door opens 180 degrees for easy loading and unloading
- Time remaining countdown



ERGONOMICAL
CONSTRUCTION



LARGE DOOR
OPENING




LOW ENERGY
CONSUMPTION



MODEL		PSEJCAGS174TG01 PSGJCAGS114TG01
CONTROL OPTION		XQ
CONTROL LOCATION		Front
CAPACITY - lb (kg)		18 (8.2)
CYLINDER VOLUME - cu. ft. (liters)		7.0 (198)
OVERALL WIDTH - in (mm)		26.875 (683)
OVERALL DEPTH - in (mm)		28 (711)
OVERALL HEIGHT - in (mm)		78.17 (1986)
MOTOR POWER CONSUMPTION - hp (kw)		0.33 (0.25)
ELECTRIC HEATING - kW		5.35
GAS HEATING - BTU		25,000
EXHAUST AIRFLOW - cfm (liters/sec)		220 (105)
ELECTRICAL CONNECTION - Voltage/Hz/Ph	Electric	120/240/60/1
	Gas	120/60/1
SHIPPING DIMENSIONS APPROX. - in (mm)	Width	30 (762)
	Depth	33 (838)
	Height	80 (2032)
NET WEIGHT - lb (kg)		270 (122)
SHIPPING WEIGHT - lb (kg)		280 (127)
AGENCY APPROVALS		cULus / cCSAus

DIMENSIONS	
A. OVERALL WIDTH - in (mm)	26.875 (683)
B. OVERALL DEPTH - in (mm)	28 (711)
C. OVERALL HEIGHT - in (mm)	78.17 (1986)
D. FLOOR TO DOOR OPENING - in (mm)	14.63 (372)
E. DOOR SWING - in (mm)	23.5 (597)

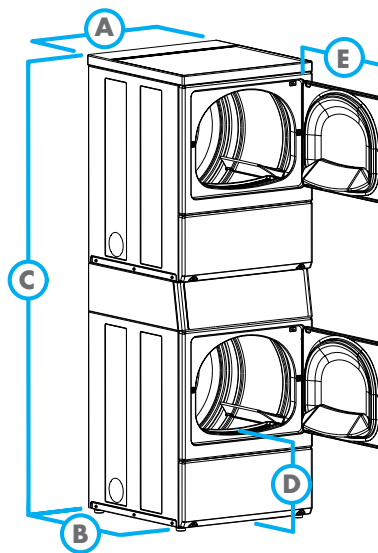

AY18-0059

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.

© 2018 Alliance Laundry Systems LLC

www.primuslaundry.com

primus

by Alliance Laundry Systems