

SPEED QUEEN MULTI-HOUSING

NOBODY COMPARES TO OUR GUTS

COMMERCIAL STACK WASHER/DRYER

Built for Reliable Performance

Nobody compares with Speed Queen because you get more than quality products. You get peace of mind because you're dealing with a company that is committed to the multi-housing industry. You get the ongoing support of a national network of authorized Speed Queen Laundry Service Providers. And you get state-of-the-art electronic technology to maximize community laundry room profitability. What else would you expect from the world's leading supplier of commercial laundry equipment?

GALVANIZED STEEL dryer cylinder will not fade, corrode, chip, crack, or discolor with normal use.

EASY-TO-READ DIGITAL DISPLAY makes programming the machine a breeze and is easy to use, displaying vend price, cycle time and cycle status.

INTEGRATED METER CASE protects against theft and vandalism.

LARGE CAPACITY coin box standard.


SEALED BEARING and aluminum bearing housing.

ALUMINUM PULLEY.

STAINLESS STEEL outer drain tub resists mold and mildew.

COMMERCIAL-DUTY brushless induction motor and high-tech drive.

SHOCK ABSORBERS four heavy-duty shocks.

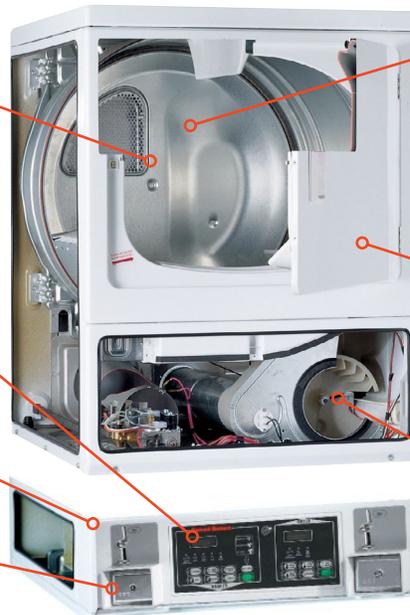

EXTRA-LARGE CAPACITY means large loads aren't a problem. The 7.0 cu. ft. (198 liter) cylinder delivers superior tumble action to handle large, bulky loads with ease.

INDUSTRY'S LARGEST DOOR OPENING measures 2.06 sq. ft. (1914cm²) for easy loading and unloading.

QUIET, EFFICIENT blower system with 220 cfm (105 liters/sec).

FOUR COMPARTMENT soap dispenser.

HEAVY-DUTY stainless steel door hinge for superior durability.

DURABLE STAINLESS STEEL TUB STANDARD 3.42 cu. ft. (96.8 liters) capacity.


FRONT SERVICEABILITY means all major components can be serviced through lower access panel.



HEAVY-DUTY ELECTRIC PUMP with foreign object trap.

FEATURES

COMMERCIAL STACK WASHER/DRYER

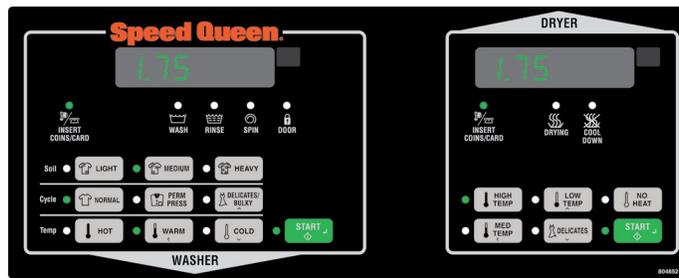

Quantum® Control Features: Digital display for vend price and cycle time countdown. Touch pad control with LEDs. Three temperature selections for hot, warm or cold water. Three fabric selections for normal, permanent press or delicate. Three soil level selections for light, medium, or heavy, offering 27 possible cycles. Push-to-Start activation. LEDs show the cycle and the door lock status. Infrared programming. Quantum models available with card or coin start operation.

NOTE: Front control design complies 100% with ADA guidelines for unobstructed reach range requirements.

ULTRA HIGH EFFICIENCY COMMERCIAL WASHER WATER USAGE

Standard Front Load DOE "J1" Testing (Quantum or Coin Slide Control)

BASKET/CYLINDER VOLUME CU. FT. (LITERS)	AVERAGE HOT WATER PER CYCLE GAL (LITER)	TOTAL WATER CONSUMPTION GAL (LITER)	MODIFIED ENERGY FACTOR FT ³ /KWH/CYCLE (LITERS/ KWH/CYCLE)	WATER FACTOR GAL/FT ³ (LITERS/ LITER/CYCLE)	ENERGY STAR® QUALIFIED
3.42 (96.8)	0.4 (1.4)	11.7 (44.3)	2.98 (84.48)	3.8 (0.52)	Yes

Water usages may vary for your particular application. One wash, two rinses.

WASH CYCLE FACTORY DEFAULT

FUNCTIONS	CYCLE OPERATION		
	NORMAL	PERM PRESS	DELICATE
CYCLE	NORMAL	PERM PRESS	DELICATE
Water Temp Options	H-W-C*	H-W-C*	H-W-C*
Wash Action	Reversing	Reversing	Reversing
Speeds			
Wash/Tumble RPM	50	50	41
Distribution/Pump RPM	90	90	90
Spin and Pump RPM	650	650	500
Extract RPM	1200	800	500
Total Cycle Time	30:00	28:00	26:00
H-W-C*			

DRYER ADVANTAGES/SELECTIONS

FEATURE	SPECIFICATION	ADVANTAGE
Cabinet Height - in (mm)	78.17 (1986)	Space-Saving Design
Cylinder Size - cu ft (liters)	70 (198)	Improves Tumbling
Lint Filter	Secured	Prevents Removal

QUANTUM TEMPERATURE SELECTION

TEMPERATURE	STANDARD SETTING	QUANTUM PROGRAMMING OPTIONS
High	160°	110° - 160°
Medium	155°	110° - 160°
Low	145°	110° - 160°
Delicate	115°	110° - 160°
No Heat	No Heat	No Heat

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.