

On-Premises **Front Control** Stack Dryer




Get the double the drying capacity in the space of one machine with Huebsch's stack dryer. With easy-to-clean lint compartments and the industry's largest doors (2.06 sq ft, or 1,913.8 sq cm) for faster loading and unloading, Huebsch stack dryers are designed to keep loads moving through the laundry.

Quality

Durable, galvanized-steel cylinders with an extra-large 7 cu ft (198L) of volume handle your biggest loads.

Efficient

Efficient dryer heating with 20,000 Btu (5,043 kCal) (gas models) and up to 5,200 W (electric models), helps keep costs down and productivity up.

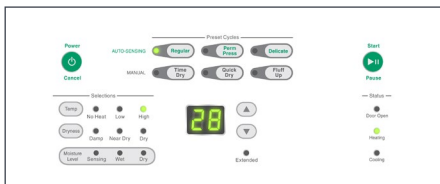

English keypad


Electronic Control

The Electronic Control keeps users informed throughout the drying process with cycle-status lights and a digital cycle countdown. Users also have the flexibility to control temperature and dryness levels to achieve high levels of efficiency. Automatic (moisture-sensing) cycles come standard to prevent over-drying of your linens.

On-Premises **Front Control Stack Dryer** Specifications

SPECIFICATIONS

AVAILABLE CONTROLS		Electronic Homestyle
MODELS	Electric	YSEE5AGS173TW01 YSEE5AGS153TW01
	Gas	YSGE5AGS113TW01
CAPACITY - lb (kg)		18 (8.2)
CYLINDER VOLUME - cu. Ft. (liters)		7.0 (198)
WIDTH - in (mm)		26.875 (683)
DEPTH - in (mm)		28 (711)
HEIGHT - in (mm)		78.17 (1986)
MOTOR SIZE - HP (kw)		0.33 (0.25)
AVAILABLE HEAT SOURCES		Electric or Gas
AVAILABLE HEATING ELEMENT (Electric W)		5350 @ 208V 5350 @ 240V
GAS INLET CONNECTION - in (mm)		3/8 (9.5)
GAS CONSUMPTION - BTU/Hr		22,500
EXHAUST OUTLET DIAMETER - in (mm)		4 (102)
EXHAUST AIRFLOW - cfm (liters/sec)		220 (105)
AVAILABLE CYCLES		Regular, Perm Press, Delicate, Time Dry, Quick Dry, Fluff Up
CYCLE INDICATOR LIGHTS		Yes
CYLINDER FINISH		Galvanized
AVAILABLE COLORS		White
DOOR TYPE (Solid/Window)		Solid
AVAILABLE ELECTRICAL REQUIREMENTS - (Voltage/Hz/Ph-Amp)	Electric	120/240/60/1 - 30 120/208/60/1 - 30
	Gas	120/60/1 - 15
NET WEIGHT - lb (kg)	Electric	262 (119)
	Gas	270 (122)
SHIPPING WEIGHT - lb (kg)	Electric	272 (123)
	Gas	280 (127)
SHIPPING WIDTH - in (mm)		30 (762)
SHIPPING DEPTH - in (mm)		33 (838)
SHIPPING HEIGHT - in (mm)		80 (2032)
AVAILABLE AGENCY APPROVALS	Electric	cULus
	Gas	cCSAus

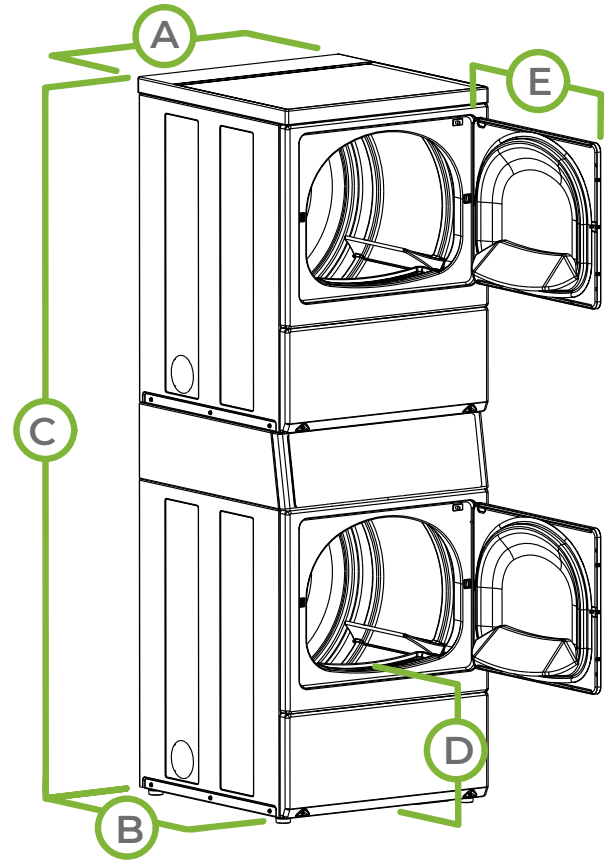

DIMENSIONS

A. OVERALL WIDTH - in (mm)	26.875 (683)
B. OVERALL DEPTH - in (mm)	28 (711)
C. OVERALL HEIGHT - in (mm)	78.17 (1986)
D. DOOR BOTTOM TO FLOOR - in (mm)	15.44 (392)
E. DOOR SWING - in (mm)	23.5 (597)

Lower unit is ADA Compliant

Note: Not all options are available for all models. Refer to the price list for the available models and options. Twelfth digit in model number indicates US or Canadian unit. C=Canada and T=US.

* Information shown applies to highest end control available.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems has been registered to ISO 9001.