

MULTI-HOUSING

Huebsch®
Commercial Washers & Dryers

COIN SLIDE

Huebsch®



BUILT FOR **RELIABLE** PERFORMANCE.

Huebsch offers the most complete range of coin slide operated laundry products: top load and front load washers and single and stack dryers, for the variety of needs in multi-housing dwellings.

With features such as water and energy efficient designs, quality internal components and high security systems, multi-housing owners can depend on Huebsch. The equipment gives them the advantage on such issues as energy conservation, equipment breakdowns and vandalism.


COIN SLIDE OPERATED MACHINES PROVIDE:

- User selectable options for Hot, Warm or Cold wash temperatures.
- Simple, dependable operation.
- StrongBox Security™ system on both washers and dryers provides top-of-the-industry security to deter vandalism of tops and metercases.
- Durable porcelain enamel tops and lids resist corrosion and scratching, assuring long-last appearance.



TOP LOAD WASHER

The Huebsch coin slide operated top load washer gives building owners and property managers unparalleled ability to reduce water and energy costs. The top load washer has met every design standard to be Department of Energy compliant to commercial washer standards for energy and water savings.

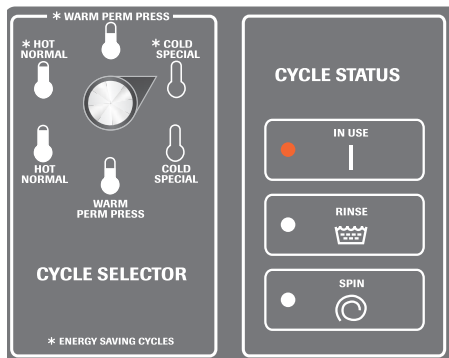

FEATURES

HIGH SPEED EXTRACT

710 RPM final spin to maximize moisture removal from clothes.

AUTOMATIC BALANCING SUSPENSION SYSTEM

ABS provides the industry's best out-of-balance handling, completing wash cycles without interruption.


DURABLE STAINLESS STEEL AND PORCELAIN ENAMEL WASH TUB

FOUR-VANE POLYPROPYLENE AGITATOR

210° agitation stroke delivers superior washability for all load sizes.

FRONT LOAD WASHER

The Huebsch front load washer gives building owners and property managers unparalleled ability to reduce water and energy costs. The front load rear control washer has met every design standard to be 100% ADA compliant.

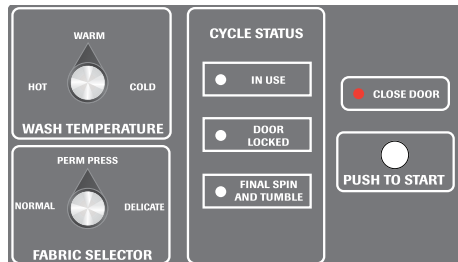

FEATURES

HIGH SPEED EXTRACT

1000 RPM final spin exerts 300 G-Force to maximize moisture removal from clothes.

LARGE DOOR OPENING

With heavy-duty stainless steel 10" (25.4 cm) hinge for easy loading and unloading of clothes.

DURABLE STAINLESS STEEL WASH TUB

Comes with a lifetime warranty, and actually becomes smoother with each use, so it won't pill, snag or fray clothes.


MULTI-COMPARTMENT SUPPLY DISPENSER

Automatically adds detergent, bleach and softener.



SINGLE LOAD DRYER

Huebsch's single load dryers combine heavy-duty construction with reliable operation proven to stand the test of time. They're designed with less moving parts for one reason: so you'll face fewer maintenance problems and less wear and tear down the road. Our cabinet design maintains the perfect balance of heat, airflow and tumble action for optimal performance and efficiency.

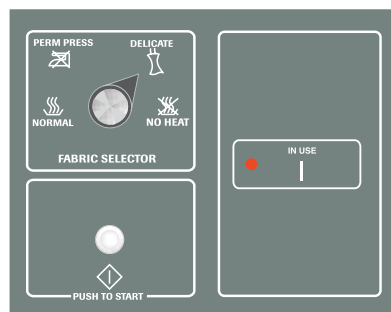

FEATURES

SUPERIOR DRYING CONVENIENCE

Industry's largest door opening 2.06 sq. ft. (1914 cm²).

EFFICIENT DRYER HEATING

With 25,000 BTU (gas models) and up to 5,350 Watts (electric models), Huebsch dryers offer some of the fastest drying times in the industry.

UPFRONT LINT FILTER

Easy to clean and secured.

REVERSIBLE DOOR (SOLID DOORS ONLY)

For installation flexibility.



STACK DRYER

The Huebsch stack dryer offers the same great features as the single load dryer. Two commercial dryers in the space of one, both operating independently, including independent controls for optimum usage.



| | Top Load Washers | Single Load Dryers | Stack Dryers | Front Load Washers | |
|------------------------------------------------------------------------|--------------------------------------|------------------------------------------------------------------------------|--------------------|----------------------------------------------------------------------------------------|--------------------------------------|
| | HWNSX1 HWNSX2S | Electric: Gas: | HDE907W HDG909W | Electric: HSG919W | HFNSXRS |
| Basket/Cylinder Volume - liters (cu.ft.) | 92.3 (3.26) | 198 (7.0) | | 198 (7.0) ea | 2.84 (80) |
| Width - mm (in) | 651 (25 5/8") | 683 (26 7/8") | | 683 (26 7/8") | 683 (26 7/8") |
| Depth - mm (in) | 711 (28") | 711 (28") | | 711 (28") | 711 (28" (711) |
| Height* - mm (in) | 1092 (43") | 1092 (43") | | 1946 (76 5/8") | 1092 (43") |
| Weight - kg (lb) | 86 (190) | Electric: 61 (135) Gas: 64 (140) | | Electric: 120 (265) Gas: 125 (275) | 109 (240) |
| Shipping Weight - kg (lb) | 95 (210) | Electric: 66 (145) Gas: 68 (150) | | Electric: 127 (280) Gas: 132 (290) | 118 (260) |
| Cycle Time - minutes (default) | 28-31 | 45 | | 45 ea | 27 |
| Motor HP (Capacitor Start and Thermal Protected) | 1/2 HP, 375W | 1/3 HP, 5.5 amps | | 1/3 HP, 5.5 amps | 1 HP, 750W |
| Water Consumption - Liter (gal) | 103.4 (27.3) | N/A | | N/A | 39.1 (10.3) |
| Water Factor - Liters/Liter/cycle (gal/ft ³) | 1.12 (8.4) | N/A | | N/A | 4.0 (0.53) |
| Modified Energy Factor - Liters/kWh/cycle (ft ³ /kWh/cycle) | 46.7 (1.65) | N/A | | N/A | 67.97 (2.40) |
| Average Hot Water Usage - Liter (gal) | 8.8 (2.3) | N/A | | N/A | 3.7 (1.0) |
| Water Pressure - psi (bar) | Pressure fill 20 to 120 (1.4/8.3) | N/A | | N/A | Pressure fill 20 to 120 (1.4/8.3) |
| Spin Speed - RPM | 2 sp 473 1 sp 710 | N/A | | N/A | 500, 650, 1000 |
| Cycle/Temperature | Normal Perm Press Delicate | Normal Perm Press Delicate No Heat | | Normal Perm Press Delicate No Heat | Normal Perm Press Delicate |
| Electrical Specifications and Circuit Requirements | 120/60/1-15 amp | Electric: 120/240/60/1-30 amp 120/208/60/1-30 amp Gas: 120-60/1-15 amp | | Electric: 2 ea 120/240/60/1-30 amp 120/208/60/1-30 amp Gas: 2 ea 120-60/1-15 amp | 120/60/1-15 amp |
| Btu per Hour (kcal) | N/A | 25,000 (6300) | | 25,000 (6300) | N/A |
| Heating Element** | N/A | 4750W, 208V 5350W, 240V | | 4750W, 208V 5350W, 240V | N/A |
| Type of Gas (Gas models only) | N/A | Factory-equipped natural/mixed gas convertible to LP gas*** | | Factory-equipped natural/mixed gas convertible to LP gas*** | N/A |
| Utility Connections - mm (in) | N/A | Gas: 3/8" NPT (9.5) | | Gas: 3/8" NPT (9.5) | N/A |
| Air Outlet Diameter - mm (in) | N/A | 102 (4") | | (102) 4" | N/A |
| Exhaust Airflow† - liters/sec (cfm) | N/A | 105 (220) | | 105 (220) | N/A |
| Maximum Exhaust Static Back Pressure | N/A | 0.6" W.C. | | 0.6" W.C. | N/A |
| Agency Approval | cULus | Electric: cULus Gas: CSA Star | | Electric: cULus Gas: CSA Star | cULus |
| Activation | Coin Slide | Coin Slide | | Coin Slide | Coin Slide |
| Top and Lid Finish | Porcelain | Porcelain | | N/A | Porcelain |
| Colors | White | White | | White | White |
| Door Type | N/A | Solid | | Solid, Window | Window |

* Heights may vary slightly depending on leveling adjustments.

** Electric dryers come equipped for 120/240/60/1 operation. They can be field converted to operate on 120/208/60/1 with optional 61928 conversion kit. Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

*** IMPORTANT: Any product revisions or conversions must be made by the Manufacturer's Authorized Dealers, Distributors, or local service personnel.

† Measured at point of exit from dryer.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.

Printed in the U.S.A.

©Copyright 2013 Alliance Laundry Systems LLC

