

**Huebsch**

**Huebsch**

**Coin-Operated & Card-Ready  
Frontload Washers,  
and Stack Washer/Dryer**



*Serving the Laundry Industry For Over 90 Years*







*Because laundry ownership can be demanding, Huebsch does a lot of the thinking for you. Our washers and dryers feature a variety of control options, an energy-efficient design, quality internal components and a high security system that reduces the chance for vandalism.*

*At Huebsch we are in the business of making your life easier with machines that make it easier for you to do business.*

## *Unmatched Warranty*

At Huebsch, we're so confident that our quality washers and dryers are built to last, we offer a **THREE** year warranty\* on the entire machine.

\*Parts only, labor not included.  
See Huebsch Warranty Bond for specifics.

**3** year limited warranty\*

## *Micro-Display Control*

The all new Micro-Display Control (MDC) from Huebsch was designed with maximum USER-FRIENDLINESS in mind.

### *Customer Friendly Features:*


- Attractive Electronic Display
- Time Remaining Countdown
- Coin Countdown (w/audible signal)
- Easy-To-Read Cycle Status Lights



### *Owner Friendly Features:*

- FANTASTIC Ease-of-Use for Customers
- Superior Energy Efficiency
- Cycle Programmability
- Factory Installed Drop Coin Meter
- Non-resettable Manual Audit

## *Rugged (Free-Standing) Commercial Design*

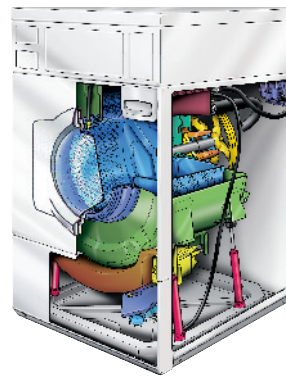

Huebsch Horizon washers feature a rugged design with **four shock absorbers, stainless steel inner and outer cylinders, a cast aluminum trunion and a cast aluminum bearing housing.** This machine is built to last! And a Horizon can be installed virtually

anywhere because the four shock absorber design absorbs the energy and vibration generated in the washer's **1000 rpm spin speed.**

Horizon washers also feature stainless steel inner and outer cylinders for a lustrous appearance and long-lasting durability.



## Stack Washer/Dryer

This innovative stacked concept takes up half the floor space that a conventional washer and dryer does when situated side by side. Both the washer and dryer have the same hook ups and connections as a standard washer and dryer, so no additional plumbing or electrical change is needed. Having a window in both the washer and dryer enables customers to view their entire laundering process.



## ADA Compliant

Huebsch front-mounted controls and supply dispensers meet handicap accessibility requirements.



## Activation Options

Huebsch offers you a choice of either electronic or electro-mechanical controls. Our Micro-Display Control models feature a factory-installed (all metal) coin drop, or they can be easily interfaced with most any after market card reader system.

### Micro-Display Controls



Frontload Washer (Coin-Op)  
Front Control



Frontload Washer (Card Ready)  
Front Control



Frontload Washer (Coin-Op)  
Rear Control



Frontload Washer (Card-Ready)  
Rear Control



Stack Washer/Dryer (Coin-Op)



Stack Washer/Dryer (Card-Ready)

## Energy Efficiency

With Huebsch washers, efficiency is built in with a **low 18.5 gal per cycle water consumption\*** and energy-saving cold water rinses. Together, our low water usage and **super-fast 1000 rpm spin speed** mean **faster drying and lower energy usage.**

\*DOE tests



In fact, all horizon washers and stack washers/dryers are so efficient they meet all U.S. Dept. of Energy requirements to be **ENERGY STAR® Qualified.**

## Gravity Drain Option

For customers who are not replacing conventional (pump drain) topload washers, we offer models with a gravity drain (**drain valve**) configuration.

### Electro-Mechanical Controls



Frontload Washer (Coin-Op)  
Rear Control





# Frontload Washers and Stack Washer/Dryer

<b>Washers</b>	<b>HWFY61 HWFT61 HWFT63</b>	<b>HWR961 HWR961 HWRY61 HWRT61 HWR963</b>
<b>Width - in (mm)</b>	26.9" (683)	26.9" (683)
<b>Depth - in (mm)</b>	28" (711)	28" (711)
<b>Height - in (mm)</b>	43" (1092)	43" (1092)
<b>Water Temperatures</b>	Hot, Warm and Cold	Hot, Warm and Cold
<b>Cycle</b> E-Mech:	Normal, Permanent Press or Delicate	Normal, Permanent Press or Delicate
<b>Total Cycle Time</b> E-Mech:	Approx. 30 min.	Approx. 30 min.
<b>Cycle</b> MDC:	Normal/Hot Normal/Warm Permanent Press/Warm Delicate/Cold	Normal/Hot Normal/Warm Permanent Press/Warm Delicate/Cold
<b>Total Cycle Time</b> MDC:	Approx. 27 min.	Approx. 27 min.
<b>Basket Volume - ft<sup>3</sup> (liters)*</b>	2.84 (80)	2.84 (80)
<b>Water Pressure</b>	20 - 120 p.s.i. (1.4/8.3 Bar)	20 - 120 p.s.i. (1.4/8.3 Bar)
<b>Spin Speed</b>	High 1000 rpm Medium 650 rpm Low 500 rpm	High 1000 rpm Medium 650 rpm Low 500 rpm
<b>Control Location</b>	Front	Rear
<b>Motor</b>	Multi-speed 3/4 HP	Multi-speed 3/4 HP
<b>Top Finish</b>	Porcelain	Porcelain
<b>Colors**</b>	White/Bisque	White/Bisque
<b>Electrical Specifications</b>	120/60/1 - 15 amp	120/60/1 - 15 amp
<b>Net Weight - lb (kg)</b>	250 (113)	240 (109)
<b>Approx. Domestic Shipping Weight - lb (kg)</b>	270 (122)	260 (118)
<b>Agency Approvals</b>	UL, CSA	UL, CSA

\* DOE cu. ft.

\*\* Card-Ready, HWFY61, HWRY61 and ALL STACKED EQUIPMENT are available in WHITE ONLY.

<b>Stack Washer/Dryer</b>	<b>Elec. Dryer: HTEY17, HTET17</b>
	<b>Gas Dryer: HTGY19, HTGT19</b>
<b>Width - in (mm)</b>	26.9" (683)
<b>Depth - in (mm)</b>	28" (711)
<b>Height - in (mm)</b>	76.5" (1943)
<b>Control Location</b>	Front
<b>Colors</b>	White**
<b>Net Weight - lb (kg)</b>	<b>Elec:</b> 360 (163) <b>Gas:</b> 365 (166)
<b>Shipping Weight - lb (kg)</b>	<b>Elec:</b> 390 (177) <b>Gas:</b> 395 (179)
<b>Agency Approvals</b>	UL, CSA, CSA Star, CSA Flame

See washer and dryer charts for detailed specifications.

<b>Dryer (Specifications for Stack Model)</b>	
<b>Cylinder Volume - cu. ft. (liters)</b>	7.0 cu. ft. (201)
<b>Cycles</b>	High Temp Medium Temp Low Temp Delicate
<b>Motor HP</b>	1/3 HP, 5.5 amps
<b>Heating Element</b>	5350 watts, 240 volt/4750, 208 volt***
<b>Btu Per Hour</b>	25,000 (6,300 kcal)
<b>Type of Gas (Gas models only)</b>	Factory-equipped natural/ mixed gas. Convertible to LP gas.
<b>Utility Connections</b>	3/8" NPT
<b>Air Outlet Diameter - in (mm)</b>	4" (102)
<b>Exhaust Airflow - (liters/sec.)†</b>	220 (105)
<b>Maximum Exhaust Static Back Pressure</b>	0.6" W.C.
<b>Electrical Specifications and Circuit Requirements</b>	<b>Elec:</b> 120/240/60/1-30 amp <b>Gas:</b> 120/60/1-15 amp
<b>Agency Approvals</b>	UL, CSA, CSA Star, CSA Flame

\*\*\* 208V operation requires field conversion.

† Measured at point of exit from dryer.

Due to continuous product improvements, design and specifications are subject to change without notice. Features and certifications may vary by model. The quality management systems at all Alliance Laundry Systems facilities have been awarded ISO 9001 certification.

©Copyright 2004 Alliance Laundry Systems LLC