



# COMMERCIAL DRYER

Huebsch® has designed commercial dryers that offer the benefits of heavy-duty commercial quality with the attractive styling of homestyle dryers. With features like extra-large capacity and a no-hassle lint filter, Huebsch commercial laundry dryers allow you to focus on your day-to-day operations instead of your laundry.

## FAST DRYING TIMES

Huebsch dryers deliver fast drying results. A 7.0 cu. ft. cylinder with an 18 lb capacity offers ample space for large loads to tumble and produce fast drying times, while lowering utility consumption.

## EASY MAINTENANCE

A secured lint filter is located upfront to allow for easy cleaning between cycles.

## LARGE, RUGGED DOOR

Our dryer has a rugged door and hinge with the industry's largest door opening, 2.06 sq. ft. The doors are also reversible for installation flexibility.


## UNMATCHED DURABILITY

Our commercial dryer is manufactured at our Ripon, WI headquarters. The entire machine receives Huebsch's standard three-year warranty. In addition, Huebsch has more service representatives in the field than most brands have in their whole organization.

\*Parts only, labor not included. See Huebsch Warranty Bond for specifics.



## ELECTRONIC HOMESTYLE CONTROL

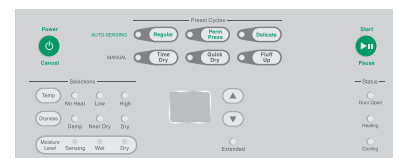

The Electronic Homestyle Control features a time-remaining display, six preset cycle buttons, cycle adjustability, cycle indicator lights and moisture level indicator lights.

# COMMERCIAL DRYER

Specifications	Front Control	Rear Control
Available Controls	Electronic Homestyle	Electronic Homestyle Emech
Models	Electric YDEE5BGS173CW01	YDEE7RGS173CW01 HDE807WF1702 YDEE7RGS153CW01
	Gas YDGE5BGS113CW01	YDGE7RGS113CW01 HDG809WF1102
Capacity - lb (kg)	18 (8.2)	18 (8.2)
Cylinder Volume - cu. Ft. (liters)	7.0 (198)	7.0 (198)
Width - in (mm)	26 7/8 (683)	26 7/8 (683)
Depth - in (mm)	28 (711)	28 (711)
Height - in (mm)	40 7/16 (1027)	43 (1092)
Motor Size - HP (kw)	1/3 (0.25)	1/3 (0.25)
Available Heat Sources	Electric or Gas	Electric or Gas
Available Heating Element (Electric W)	4750 @ 208V 5350 @ 240V	4750 @ 208V 5350 @ 240V
Gas Inlet Connection - in (mm)	3/8 (9.5)	3/8 (9.5)
Gas Consumption - BTU/Hr	22,500	22,500
Exhaust Outlet Diameter - in (mm)	4 (102)	4 (102)
Exhaust Airflow - cfm (liters/sec)	220 (105)	220 (105)
Available Cycles*	Regular, Perm Press, Delicate, Time Dry, Quick Dry, Fluff Up	Regular, Perm Press, Delicate, Time Dry, Quick Dry, Fluff Up
Cycle Indicator Lights	Yes	Yes
Cylinder Finish	Galvanized	Galvanized
Available Colors	White	White
Door Type (Solid/Window)	Solid	Solid
Available Electrical Requirements - (Voltage/Hz/Ph)	Electric: 120/240/60/1 - 30 Amp Electric: 120/208/60/1 - 30 Amp Gas: 120/60/1 - 15 Amp	Electric: 120/240/60/1 - 30 Amp Electric: 120/208/60/1 - 30 Amp Gas: 120/60/1 - 15 Amp
Net Weight - lb (kg)	Elec/Gas 145/150 (66/68)	Elec/Gas 130/135 (59/61)
Shipping Weight - lb (kg)	Elec/Gas 155/160 (70/73)	Elec/Gas 140/145 (64/66)
Shipping Width - in (mm)	29 (737)	29 (737)
Shipping Depth - in (mm)	32 3/4 (832)	32 3/4 (832)
Shipping Height - in (mm)	45 1/2 (1156)	45 1/2 (1156)
Available Agency Approvals	Elec: <sub>C</sub> UL <sub>US</sub> , Gas: <sub>C</sub> CSA <sub>US</sub>	Elec: <sub>C</sub> UL <sub>US</sub> , Gas: <sub>C</sub> CSA <sub>US</sub>

\* Information shown applies to highest end control available

Note: Not all options are available for all models. Twelfth digit in model number indicates US or Canadian unit. C=Canada & T=US.

Refer to the price list for the available models and options.

ADA Compliant

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.

©Copyright 2015 Alliance Laundry Systems LLC

Alliance Laundry Systems LLC  
Shepard Street  
Ripon, WI 54971  
1-800-533-5120  
huebsch.com

