



## EXCEPTIONAL CHOICES

For more than half a century, Cissell has been an industry leader in the design and innovation of laundry equipment. That's just the history built into its Firemen's Turn-out Gear Drying Cabinet. The result of years of research and development, the cabinet provides an ideal combination of efficiency in design and durability in construction.

### *The Cabinet Features:*

- Gently dries garments to prevent excessive wear and tear. Prevents shrinkage and damage.
- Solid construction with electrostatically applied powder paint, inside and out, for rust inhibition.
- Removable hangers for easier handling.
- Two independent heating and fan systems.
- Short drying times.
- Drain for excessive water drippings.


Cissell's Firemen's Turn-out Gear Drying Cabinet operates with two separate heated air systems. One system dries the turnout gear by blowing warm air through the hangers into the garments and out the arms and legs, thus drying from the inside. The other system blows warm air from the side of the cabinet around the outside of the garments.

## EXCEPTIONAL CAPACITY

Cissell's Firemen's Turn-out Gear Drying Cabinet can handle from one to five fire suits at a time. With optional boot (two pairs of boots per rack), glove (four pairs of gloves per rack), and hose racks, it also is very versatile.



With several turnout gear manufacturers advising against tumble drying of their protective clothing, Cissell's gentle drying process offers a safe alternative. Cissell's dryer will help return gear to service faster than air drying alone, and without risking damage to the protective qualities of the high-tech fibers.

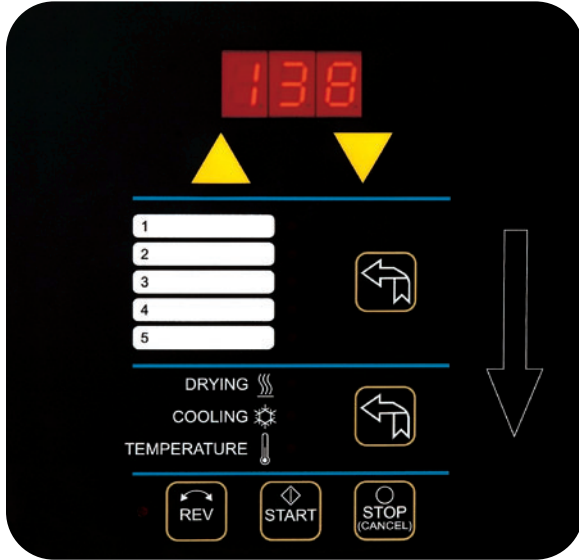

## EXCEPTIONAL CONTROL

Cissell's Microprocessor Control is designed to manage the drying and cooling cycles of the gear cabinet. The controller is pre-programmed with five different default programs or the operator may modify the default programs. The operator has the flexibility to select the time for the drying and cool-down cycles and the drying temperature.

### *The Control Features:*

- Drying Time: 0 - 180 minutes.
- Cooling Time: 2 - 60 minutes.
- LED display of cycle time, set temperature, and actual temperature.
- Thermistor controlled temperature.
- Buzzer for end of cycle, audible alarm.
- Five user-programmable programs.
- Monitors the thermistor for operation.

## Specifications

	AGC
Capacity	Five Suits of Turn-out Gear
Electric Heating	12 kW
Electric Connection	208 V / 50-60 Hz / 1 Ph • 70 amp
• Minimum Breaker Size	208 V / 50-60 Hz / 3 Ph • 40 amp 240 V / 50-60 Hz / 1 Ph • 60 amp 240 V / 50-60 Hz / 3 Ph • 35 amp
Exhaust Diameter - in (mm)	6" (153)
Outlet Airflow - cfm (m3/h)	300 (510)
Width - in (mm)	55 1/8" (1400)
Depth - in (mm)	31 1/8" (791)
Height - in (mm)	Outer: 81 1/2" (2070) Inner: 73 5/8" (1870)
Net Weight - lb (kg)	411 (186)
Shipping Weight - lb (kg)	769 (349)

Due to continuous improvements, design and specifications subject to change without notice. The quality management systems at all Alliance Laundry Systems manufacturing facilities are registered as ISO 9001:2000 compliant.

Printed in the U.S.A.



Printed on paper manufactured with virgin pulp from certified sources and a minimum of 10% post-consumer recovered fiber.



P.O. Box 990 • Ripon, WI • 54971-0990

888-223-2980

[www.cissellmfg.com](http://www.cissellmfg.com)