

ON-PREMISES LAUNDRY **TUMBLE DRYER** ST075

PRODUCT SPECIFICATIONS

Cabinet Dimensions

Capacity	75 lb
Width	38 5/8"
Depth	54 1/4"
Height	76 5/8"
Cylinder Diameter	37"
Cylinder Depth	36"
Cylinder Volume	22.4 cu. ft.
Door Opening Size	26 7/8"

Energy Data

Gas Models - Per Pocket	165,000 Btu/hr
Steam Models - 100 psi	210,300 Btu/hr
Electric Models	30 kW

Connections

Gas	1/2" NPT
Plumbing Connections - Steam	3/4" NPT
Air Outlet	8"

Motor

Motor	Rev	Non Rev
Fan	1/3 HP	3/4 HP
Cylinder	1/3 HP	N/A

Airflow

Gas/Steam Models	920 cfm
Electric Models	750 cfm

Shipping

Net Weight	Gas/Steam: 615 lb; Electric: 615 lb;
Shipping Weight	Gas/Steam: 677 lb; Electric: 677 lb;
Shipping Width	41 1/2"
Shipping Depth	56 1/2"
Shipping Height	81"

Agency Approvals

Gas Models	CSA, CE
Electric and Steam Models	CSA, CE

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO#9001:2000.


FEATURES & BENEFITS

- Precise drying performance with OPT (Over-Dry Prevention Technology).
- Concentrated airflow pattern and sealed cylinder rims ensure maximum air utilization and energy savings.
- Large, easy to clean lint compartment.
- Fewer moving parts mean fewer maintenance problems and less wear.
- High performance heater box increases energy efficiency, reduces drying times and provides more comfortable operating environment.



AVAILABLE CONTROLS

Control	Description
Quantum Gold	Quantum Gold offers the flexibility of 30 programmable cycles combined with the accuracy of our moisture sensing technology (OPT) that prevents over drying, saving time and energy.
Dual Digital	Set drying time, temperature and cool down. Features include one touch cycle repeat, automatic extended tumble and large digital countdown display.

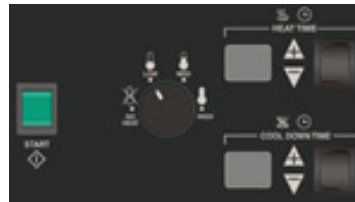

ELECTRICAL SPECIFICATIONS

Gas and Steam		Electric	
Voltages	Amps	Voltages	Amps
120/60/1	13.8	200-208/60/3	89/88
200-208/240/60/1	7.6	240/60/3	79/78
200-208/240/60/3	3.8/4.3	480/60/3	38/38
460-480/60/3	1.9/2.1		

Speed Queen®