

# SPEED QUEEN ON-PREMISES LAUNDRY


**FRONT CONTROL** LSEE5AGS173TW01, LSEE5AGS153TW01, LTEE5AGW173TW01, LSEE5AGW153TW01, LSGE5AGS113TW01, LSGE5AW113TW01, SSEMNAGS171TW01, SSEMNAGS151TW01, SSGMNAGS111TW01

## STACK DRYER

### Stack Dryers


Get twice the drying capacity in the compact floor space of a single dryer with Speed Queen® stack dryers. Combined with extra capacity for large loads, the stack dryer gets the maximum amount of work done without breaking the bank – or your laundry design.

- Extra large capacity for large loads.
- 2.06 sq. ft. door opening is the largest in the industry, providing easy loading and unloading.
- Efficient dryer heating with 25,000 Btu (gas models) and 5,320 Watts (electric models)

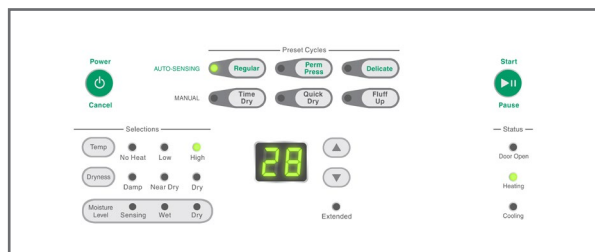

### Electronic Homestyle

Speed Queen® dryers with Electronic Homestyle controls are designed for durability and are easy to operate with intuitive selection buttons and cycle status indicator lights. This control option features a time-remaining display, six preset cycle buttons, cycle adjustability for temperature and load size.

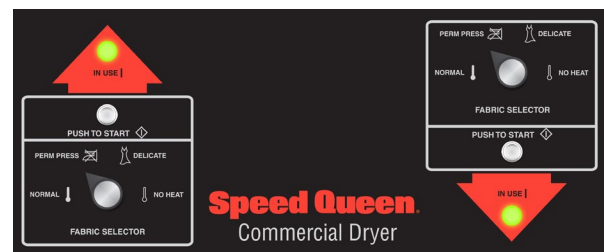


### E-Mech

The E-Mech control features a straightforward design that offers users simple water temperature and fabric selections. Cue Lights keep them aware of whether the machine is in use, as well as the current cycle status.

# SPECIFICATIONS

## STACK DRYER

MODEL/ CONTROL OPTION	Electronic Homestyle	LSEE5AGS173TW01, LSEE5AGS153TW01, LSEE5AGW173TW01, LSEE5AGW153TW01, LSGE5AGS113TW01, LSGE5AGW113TW01
	E-Mech	SSEMNAGS171TW01, SSEMNAGS151TW01, SSGMNAGS111TW01
CONTROL LOCATION	Front	
CAPACITY - lb (kg)	18 (8.2)	
CYLINDER VOLUME - cu. ft. (liters)	7.0 (198)	
OVERALL WIDTH - in (mm)	26 7/8 (683)	
OVERALL DEPTH - in (mm)	28 (711)	
OVERALL HEIGHT - in (mm)	78 3/16 (1986)	
MOTOR POWER CONSUMPTION - hp (kw) VARIABLE SPEED INDUCTION	1/3 (0.25)	
AVAILABLE HEAT SOURCES	Gas or Electric	
AVAILABLE HEATING ELEMENT (Electric W)	5350 @ 240V	
GAS INLET CONNECTION - in (mm)	3/8 (9.5)	
GAS CONSUMPTION - BTU/Hr	22,500	
EXHAUST OUTLET DIA. - in (mm)	4 (102)	
EXHAUST AIRFLOW - cfm (liters/sec)	220 (105)	
*AVAILABLE CYCLES	Regular, Perm Press, Delicate, Time Dry, Quick Dry, Fluff Up	
CYCLE INDICATOR LIGHTS	Yes	
CYLINDER FINISH	Galvanized	
AVAILABLE COLORS	White	
DOOR TYPE (Solid/Window)	Solid or Window	
AVAILABLE ELECTRICAL REQUIREMENTS - Voltage/Hz/Ph - Circuit Amperage	Electric	120/240/60/1 -30
	Gas	120/60/1 - 15
SHIPPING DIMENSIONS APPROX. - in (mm)	Width	29 (737)
	Depth	32 3/4 (832)
	Height	80 (2032)
NET WEIGHT - lb (kg)	Electric	240 (109)
	Gas	250 (113)
SHIPPING WEIGHT - lb (kg)	Electric	255 (115)
	Gas	265 (120)
AGENCY APPROVALS	Electric	cULus
	Gas	cCSAus

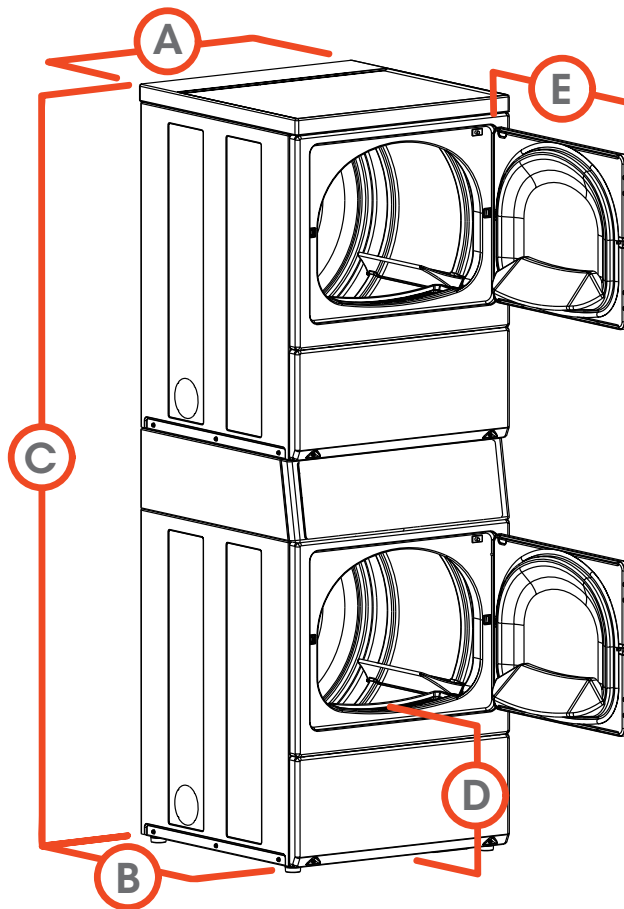

A.	OVERALL WIDTH - in (mm)	26 7/8 (683)
B.	OVERALL DEPTH - in (mm)	28 (711)
C.	OVERALL HEIGHT - in (mm)	78 3/16 (1986)
D.	FLOOR TO DOOR OPENING - in (mm)	15 7/16 (392)
E.	DOOR SWING - in (mm)	23 1/2 (597)

ADA Compliant - Lower Unit

Note: Not all options are available for all models. Refer to the price list for the available models and options.

\* Information shown applies to highest end control available.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.