


# Speed Queen®

## Commercial Heavy Duty Single Load Front Control Dryer

Micro Display Control  
SFET07 (elec)  
SFGT09 (gas)

### Description

- Companion model for front control washer
- Four temperature selections
  - ◀ Four cycles
    - High temp
    - Medium temp
    - Low temp
    - Delicates
- Micro-display coin operated control
  - Vend price programmable
  - Time countdown
  - Non-resettable cycle counter
- Touch pad control
  - Sound annunciator
- Factory installed coin drop validator
- Americans with Disabilities Act (ADA) compliant

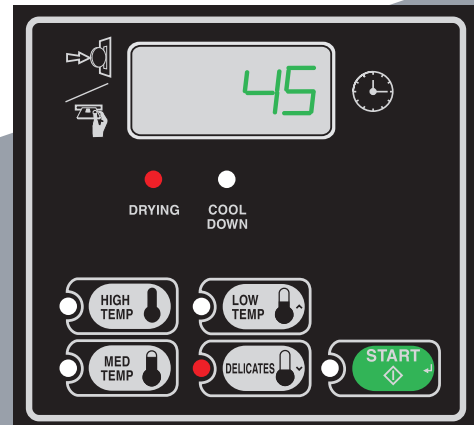

### Features & Benefits

- Extra large 7.0 cu. ft., 18 lb. capacity galvanized steel cylinder.
- Wide door opening of 2.06 sq. ft. is the industry largest, offering residents easy loading and unloading.
- Tuff Guard top finish for long lasting appearance.
- 100% serviceable from the front.
- Door is reversible for installation flexibility.



- High efficiency exhaust blower with superior airflow of 220 cfm.
- Efficient dryer heating with:
  - 25,000 BTU (gas) 6,300 kcal/hr
  - 5,350 watts (elec) 4,600 kcal/hr
- Up-front polyester lint filter is easy to clean and secured.
- Space-saving narrow cabinet (26-7/8 wide).



Commercial Built to Last Longer

# Specifications

Model	SFET07 (elec) SFGT09 (gas)
Width - in. (mm)	26 7/8" (683)
Depth - in. (mm)	28" (711)
Height - in. (mm) To Work Surface	43" (1,092)
Dry Cycles	High, Medium, Low, Delicate
Cylinder Volume (capacity) - cu. ft. (liters)	7.0 (198)
Btu Per Hour - Gas Heating (kcal)	25,000 (6,300)
Motor HP	1/3 HP, 5.5 amps
Type of Gas (gas models only)	Factory-Equipped Natural / Mixed Gas Convertible to LP Gas+
Utility Connections - in. (mm)	3/8" NPT (9.5)
Air Outlet Diameter - in. (mm)	4" (102)
Exhaust Airflow - (liters/sec)	220 (105)
Maximum Exhaust Static Back Pressure	0.6" W.C.
Electrical Specifications Circuit Requirements	Elec 120/240/60/1 - 30 amp 120/208/60/1 - 30 amp Gas 120/60/1 - 15 amp
Colors	White
Net Weight - lbs. (kg)	Elec 140 (61) Gas 140 (68)
Shipping Weight - lbs. (kg)	Elec 145 (66) Gas 150 (68)
Code Standard	Gas Underwriters Laboratories Elec CSA Star

Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at all Alliance Laundry Systems facilities have been awarded ISO 9001 certification. Features and certifications may vary by model.

At Speed Queen, we're confident that our heavy duty commercial washers and dryers are built better to last longer, that we're offering the following limited warranty to prove it. (+Parts only. Labor not included. See Speed Queen Warranty Bond for specifics.)

- **Through three years+**
  - a. Any part of the washer, single and stack dryer or stack washer/dryer.
- **Through five years+**
  - a. Top load washer transmission assembly.
  - b. Base and cabinet assembly including top, lid and door, against rust from inside out.
- **Life of product+**
  - a. Stainless steel wash tub (top load washer) or stainless steel inner cylinder (front load washer).

