

# Speed Queen®


## Commercial Heavy Duty Stack Washer / Dryer

Micro Display Control  
STET77 (elec)  
STGT79 (gas)




### Description

- Ultra high efficient with high speed extracts and low water consumption - only 14.8 gallons
- Attractive control panel
- Two separate controls allow washer and dryer to operate independently
- Multi-cycle and temperature controls offers choice of 4 washer and 3 dryer cycles
- Dryer airflow one of industry's highest at 220 cfm
- Can be installed on any floor type at any level
- Unit is factory assembled top and lower unit
- Micro-display coin operated control
  - Vend price programmable
  - Time countdown
  - Non-resettable cycle counter
- Touch pad control
  - Sound annunciator
- Factory installed coin drop validator

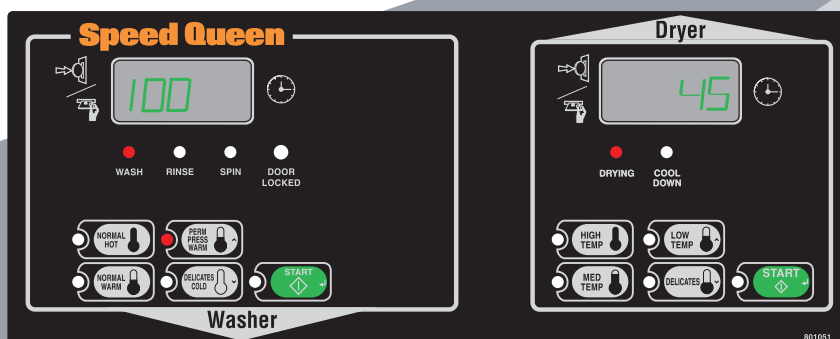

### Features & Benefits

- Multi-compartment supply dispenser. Automatically adds detergent, liquid bleach and liquid softener.
- High speed extract. 1000 rpm final spin extract maximizes water removal from clothes for faster drying.
- Stainless steel wash tub.
  - Full length SS baffles maximizes clothes turn for better washing.
  - There are 4,912 round perforated tub holes for superior washing.
- Long lasting cast aluminum trunnion and bearing housing.
- Shipped as one unit.



- Large "big load" 15-1/2" door opening with see thru glass.
  - Heavy duty 10" piano hinge door.
  - Door swing 180°.
- Efficient dryer heating. 25,000 BTU (gas models) 5,350 W (elec models)
- Up-front lint filter is easy to clean and secured.
- Space-saving narrow cabinet (26-7/8 wide).
- ADA compliant (lower unit).
- ENERGY STAR® qualified.
  - Modified Energy Factor (MEF) 2.16
  - Water Factor (WF) 5.2



Commercial Built to Last Longer

# Specifications


Model	STET77 (elec) STGT79 (gas)
Width - in. (mm)	26 7/8" (683)
Depth - in. (mm)	28" (711)
Height - in. (mm)	76 5/8" (1,946)
Net Weight - lbs. (kg)	Gas 365 (166) Elec 360 (163)
Shipping Weight - lbs. (kg)	Gas 395 (179) Elec 390 (177)
Code Standard	Gas CSA Star Elec UL
Color	White

Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at all Alliance Laundry Systems facilities have been awarded ISO 9001 certification. Features and certifications may vary by model.

At Speed Queen, we're confident that our heavy duty commercial washers and dryers are built better to last longer, that we're offering the following limited warranty to prove it. (+Parts only. Labor not included. See Speed Queen Warranty Bond for specifics.)

- **Through three years+**
  - a. Any part of the washer, single and stack dryer or stack washer/dryer.
- **Through five years+**
  - a. Top load washer transmission assembly.
  - b. Base and cabinet assembly including top, lid and door, against rust from inside out.
- **Life of product+**
  - a. Stainless steel wash tub (top load washer) or stainless steel inner cylinder (front load washer).

<b>WASHER</b>	
Cycles	Normal/hot, normal/warm, perm press/warm, delicates/cold
Water Temperature	Hot, Warm, Cold
Wash / Tumble - RPM	41, 50
Distribution / Pump - RPM	90
Spin Speeds - RPM	500, 650, 1,000
Motor - HP	1/3 HP, 5.5 amps 3/4 HP, 750 W
Water Pressure - psi (bar)	Fill 20 - 120 (1.4 - 8.3)
Electrical Specifications	Gas 120/60/1 - 15 amp Elec 120/240/60/1 - 30 amp 120/208/60/1 - 30 amp
<b>DRYER</b>	
Cylinder Volume - cu. ft. (liters)	7.0 (198)
Four Temperatures	High, Medium, Low, Delicate
Energy Input	Gas 22,500 BTU Elec 120/208/60/1 - 4,750 watts 120/240/60/1 - 5,350 Watts 220/60/1 - 5,000 Watts 230/50/1 - 4,800 Watts
Electrical Specifications	Gas 120/60/1 - 15 amp Elec 120/240/60/1 - 30 amp 120/208/60/1 - 30 amp

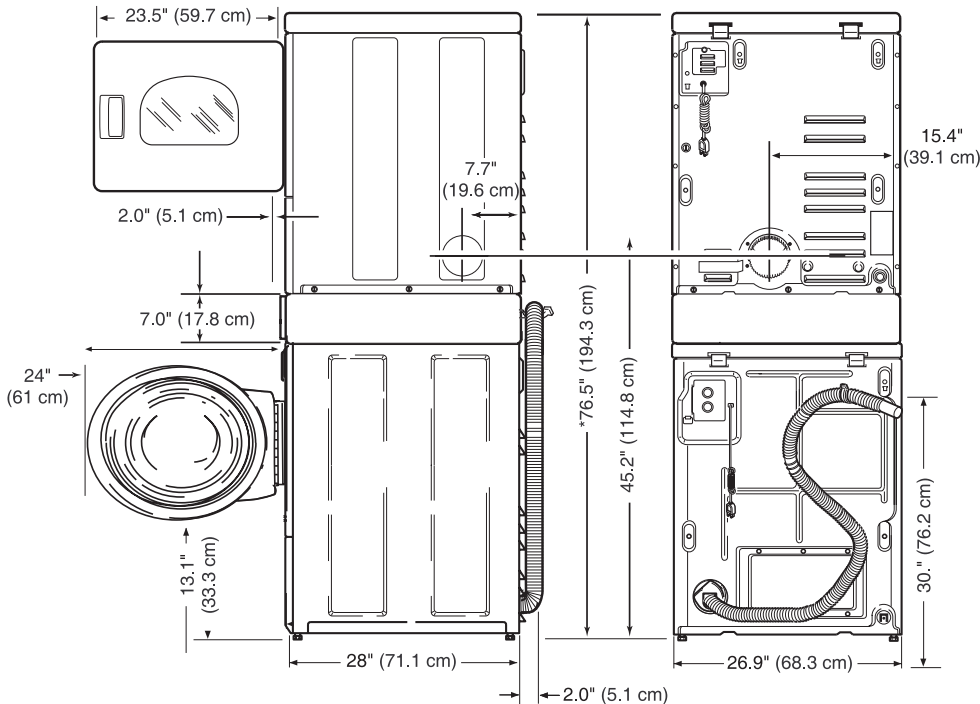

Temperature Selection	
Temperature	Setting
Delicate	115°
Low	145°
Medium	155°
High	160°