


# Speed Queen®


## Commercial Heavy-Duty

Manual Control  
Stack Dryers

KES17 Electric Dryer  
KGS17 Gas Dryer

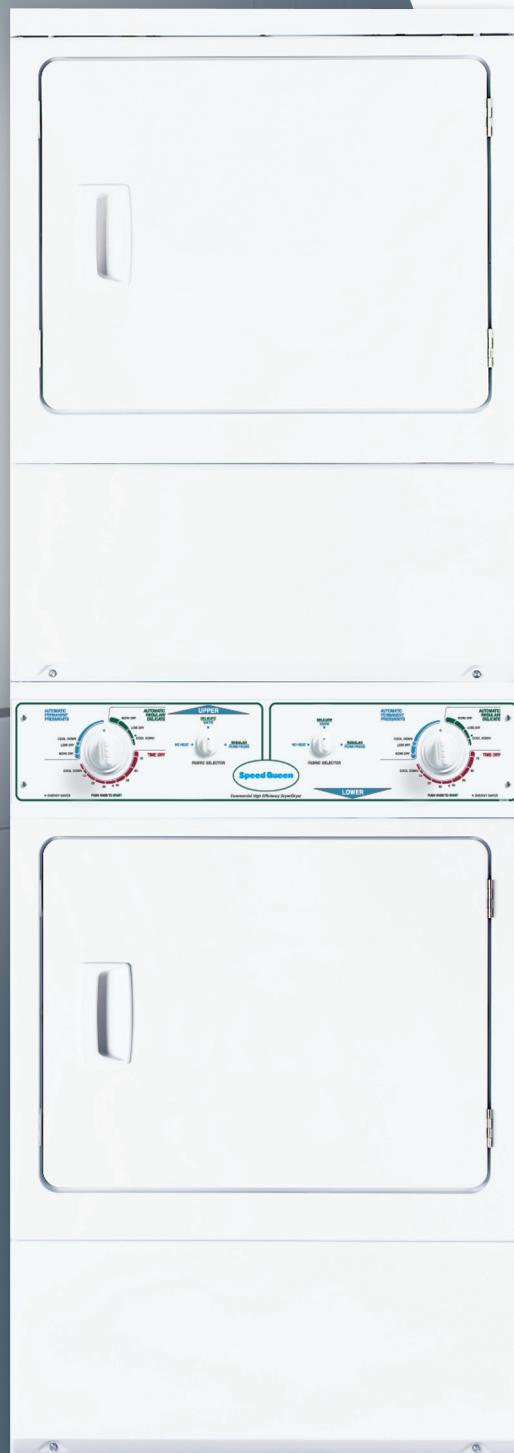

Commercial Built to Last Longer

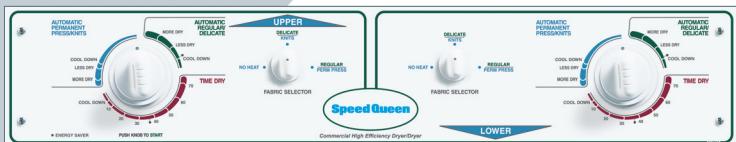

## Commercial Quality

Built tough to stay that way. The No. 1 supplier of commercial coin-operated laundry equipment, Speed Queen continues to lead in customer satisfaction. Speed Queen homestyle washers and dryers feature many of the same rugged, reliable parts found in the coin-operated machines, so they're built to last.

## Superior Drying Convenience

- A wide door opening of 2.06 sq. ft. is the industry's largest, offering residents the convenience of easy loading and unloading.
- Door is reversible for installation flexibility. The upfront lint filter is easy to clean and secured.

## Drying and Energy Dynamics

- Durable galvanized steel cylinder with extra-large 18 lb capacity. The gentle tumble action minimizes wrinkles.
- Quiet, efficient blower system with superior airflow of 220 cu. ft. per minute for fast drying and lower operating costs.
- Efficient dryer heating with 22,500 Btu (gas models) and 5,350 Watts (electric models).



## Stack Dryer Features

- A space saver! Two dryers in the space of one, both operating independently.
- 100% serviceable from the front.

## Stack Dryer Specifications

	Electric: KES17 Gas: KGS17
Cylinder Volume - cu. ft. (liters)	7.0 (198) Each 14 (396) Total
Width - in (mm)	26 7/8" (683)
Depth - in (mm)	28" (711)
Height - in (mm)	75 1/4" (1911)
Weight - lb (kg)	Electric: 240 (109) Gas: 250 (113)
Shipping Weight - lb (kg)	Electric: 255 (115) Gas: 265 (120)
Motor HP	2 x 1/3 HP, 5.5 amps
Cycle/Temperature	Regular/Perm Press Delicate/Knits No Heat
Electrical Specifications	Electric: 2 x 120/240/60/1-30 amp Gas: 2 x 120/60/1-15 amp
Motor - RPM	2 x 60 Hz: 1725
Btu per Hour	22,500 (5760 kcal) Per Pocket
Heating Element	5350 W, 240 V Per Pocket
Type of Gas (Gas Models Only)	Factory-equipped natural/mixed gas. Convertible to LP gas.*
Utility Connections - in (mm)	Gas: 2 x 3/8" NPT (9.5)
Air Outlet Diameter - in (mm)	2 x 4" (102)
Exhaust Airflow** - cfm (m³/hr)	2 x 220 (374)
Maximum Exhaust - Static Back Pressure	0.6" W.C.
Agency Approval	Electric: cUL <sub>us</sub> Gas: CSA Star
Activation	Push-to-Start
Colors	White
Door Type	Solid

\* IMPORTANT: Any product revisions or conversions must be made by the Manufacturer's Authorized Dealers, Distributors, or local service personnel.

\*\* Measured at point of exit from dryer.

At Speed Queen, we're so confident that our heavy-duty commercial washers and dryers are Commercial Built to Last Longer, that we're offering the following limited warranty to prove it: Through three years† — Any part of the washer, dryer or stack dryer. Through five years† — The washer transmission assembly, base and cabinet assembly including top, lid and door, against rust from inside out. Lifetime† — The stainless steel washtub.

† Parts only. Labor not included. See Speed Queen Warranty Bond for specifics.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2000. Features and certifications may vary by model.

©Copyright 2009 Alliance Laundry Systems LLC